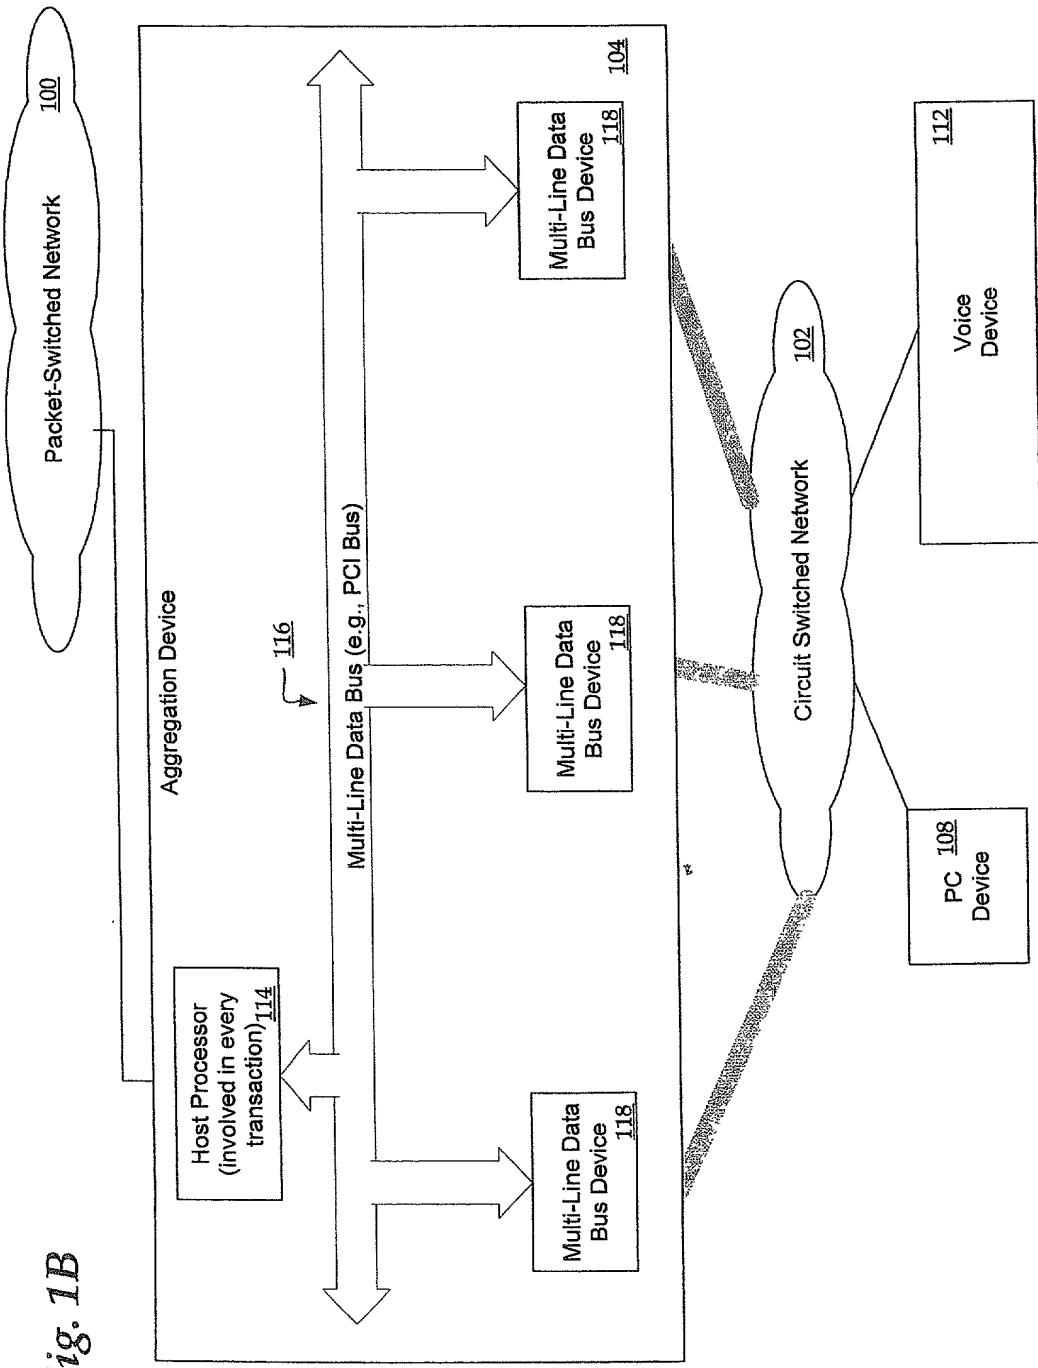


Fig. 1A
1/30

Fig. 1B




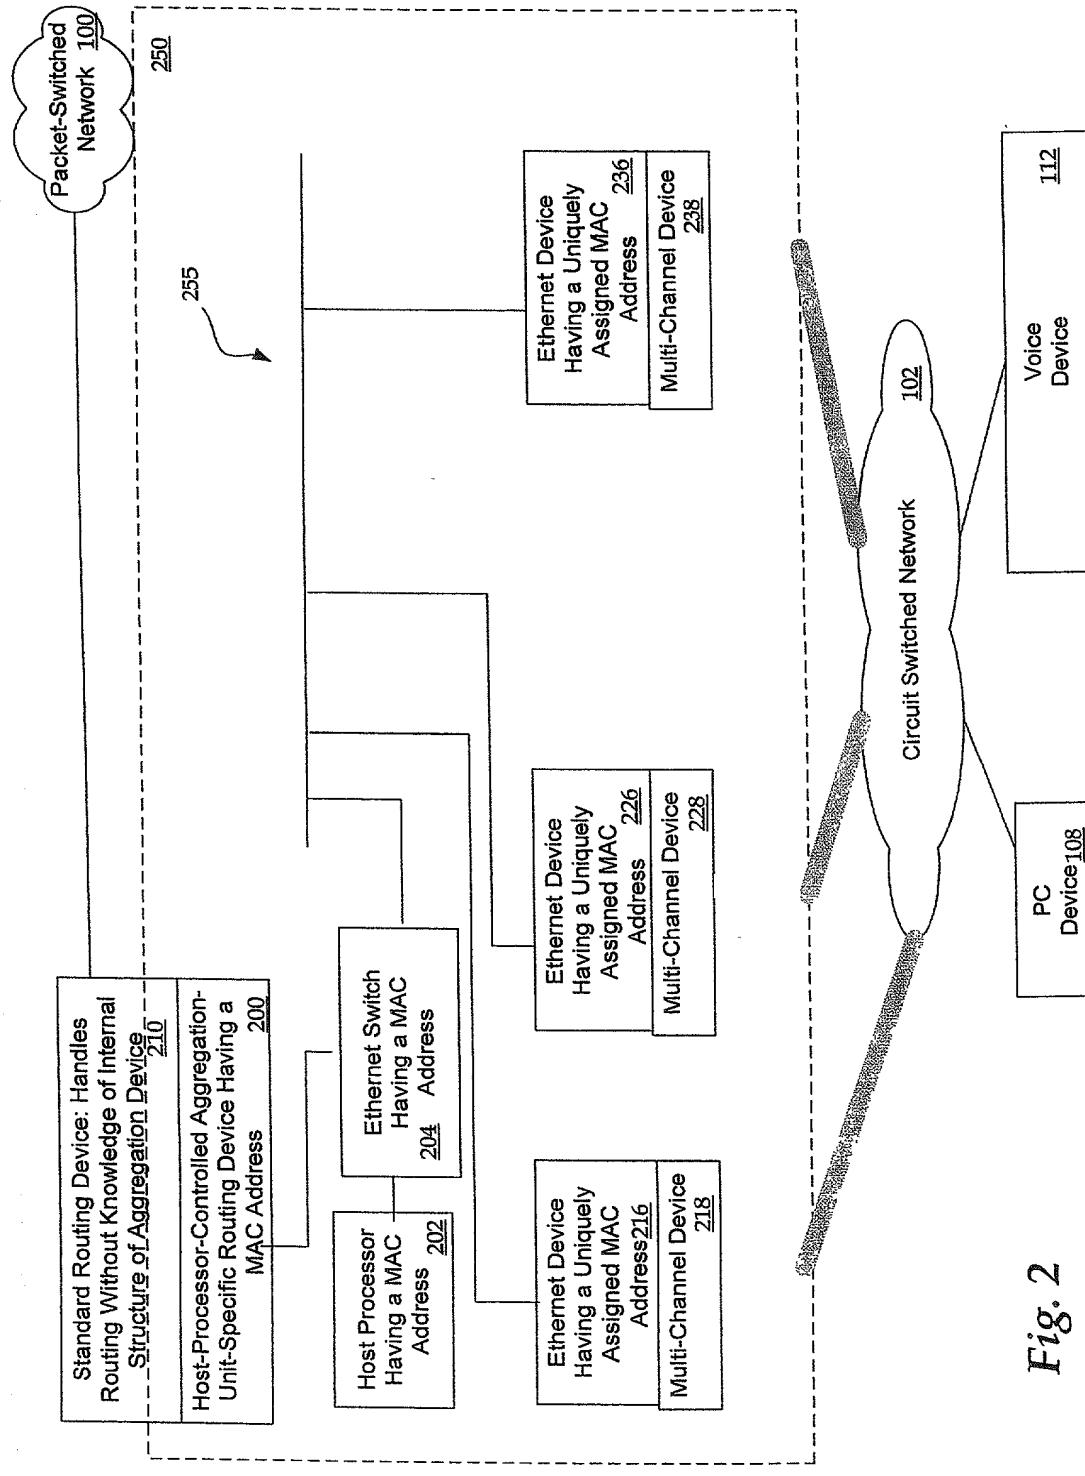


Fig. 2
3/30

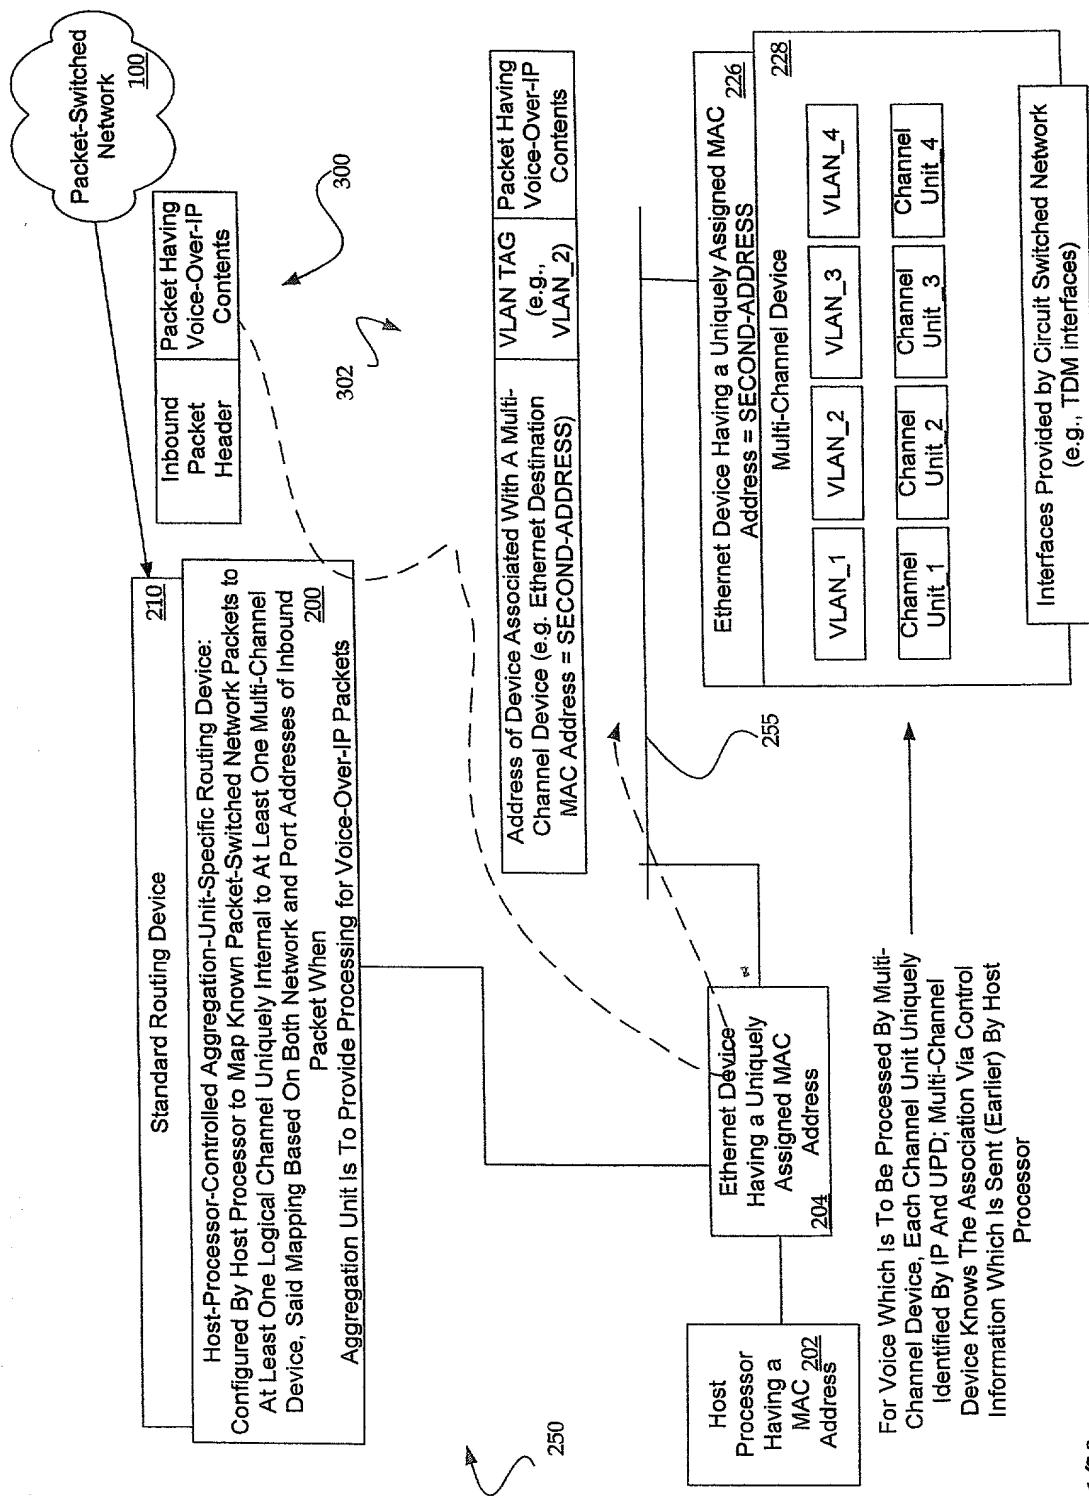

4/30 Fig. 3A

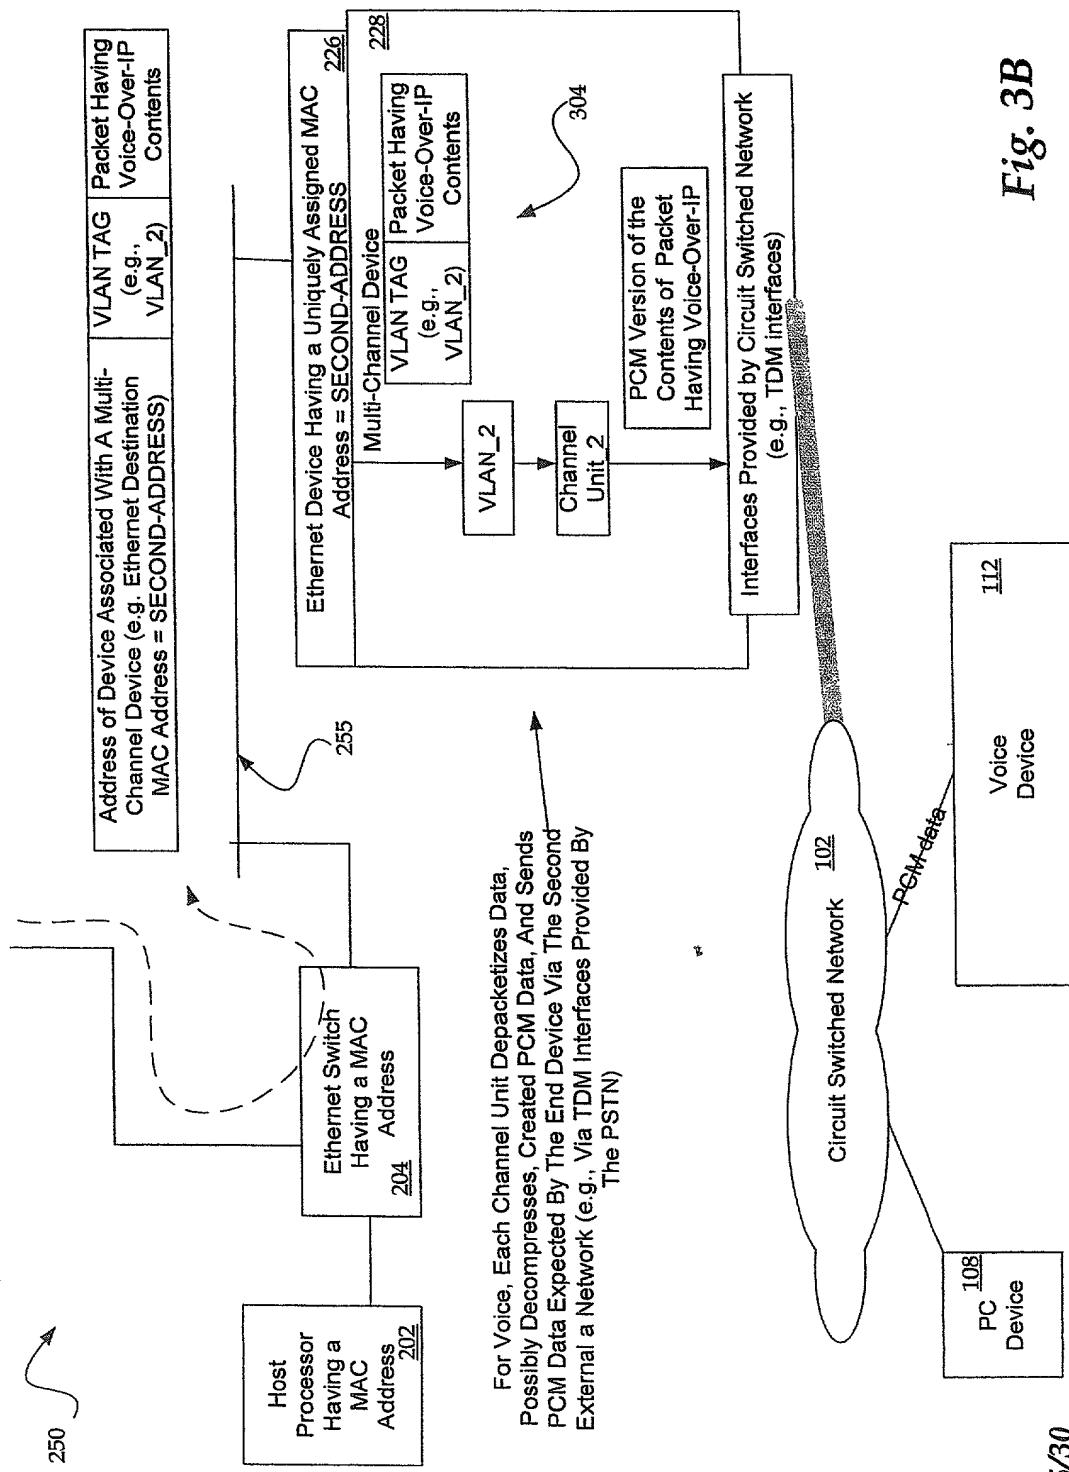


Fig. 3B

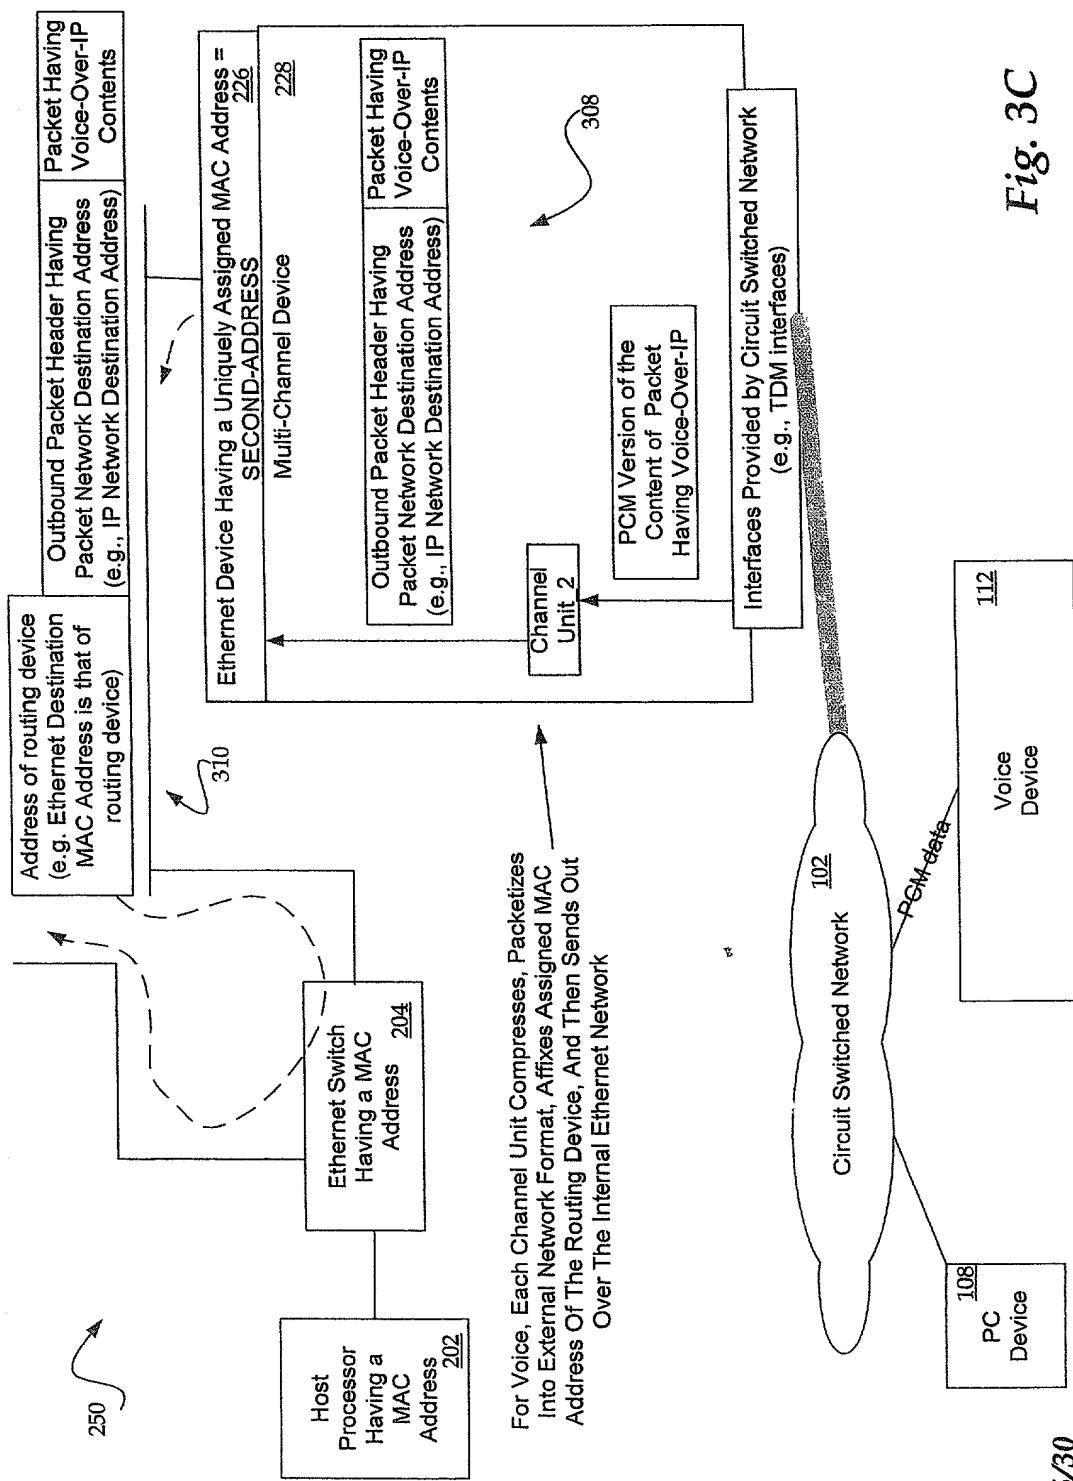
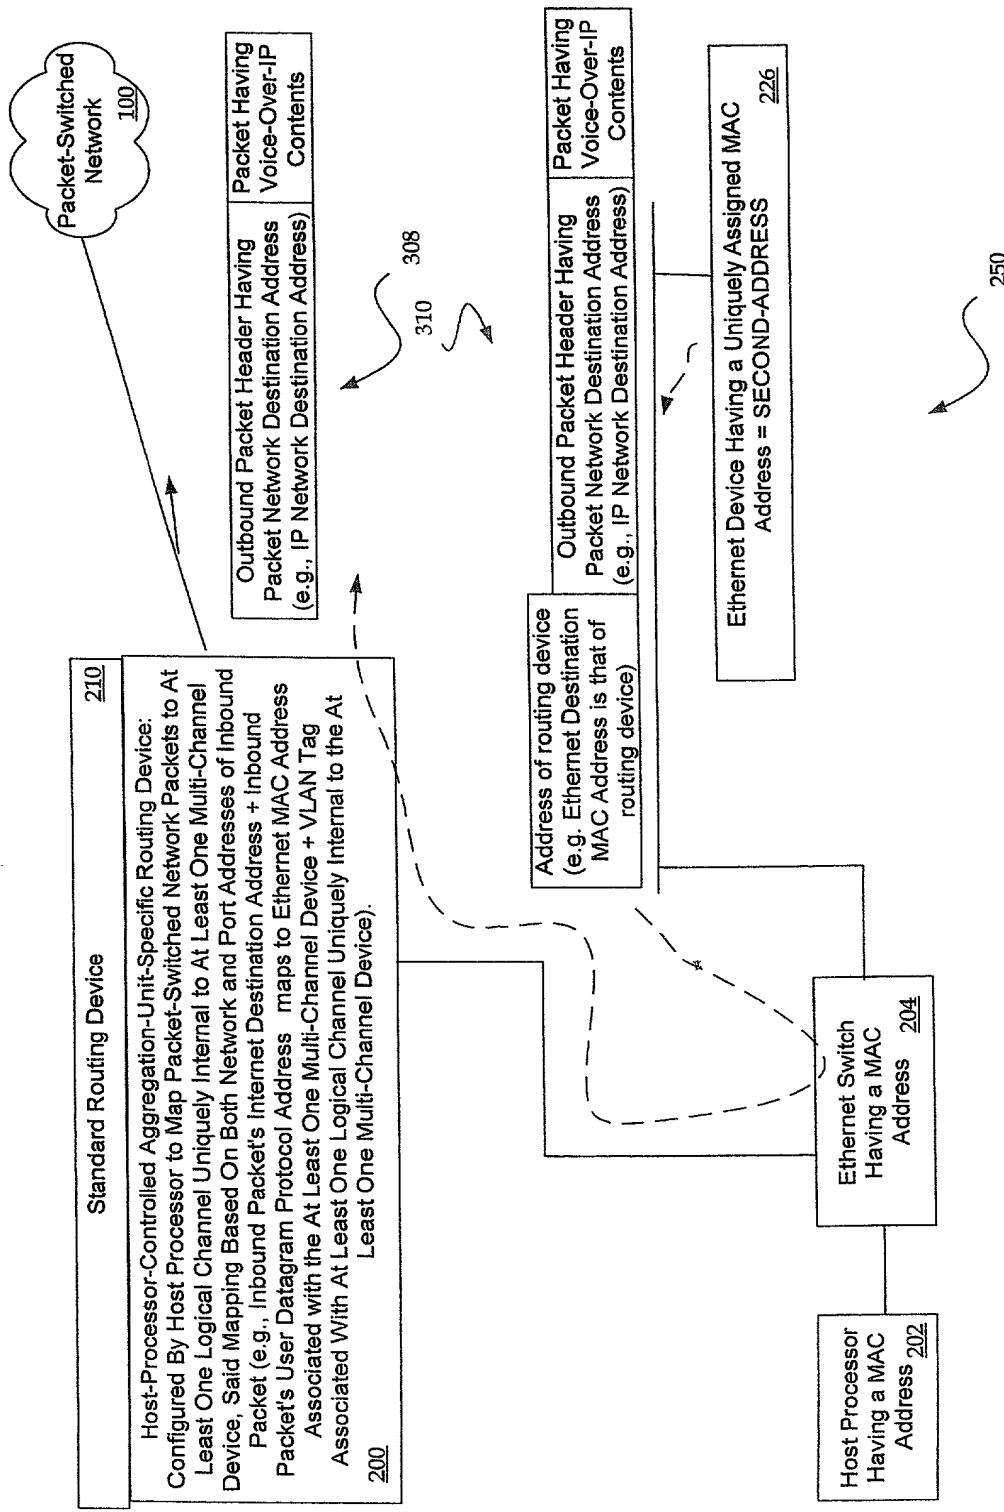


Fig. 3C



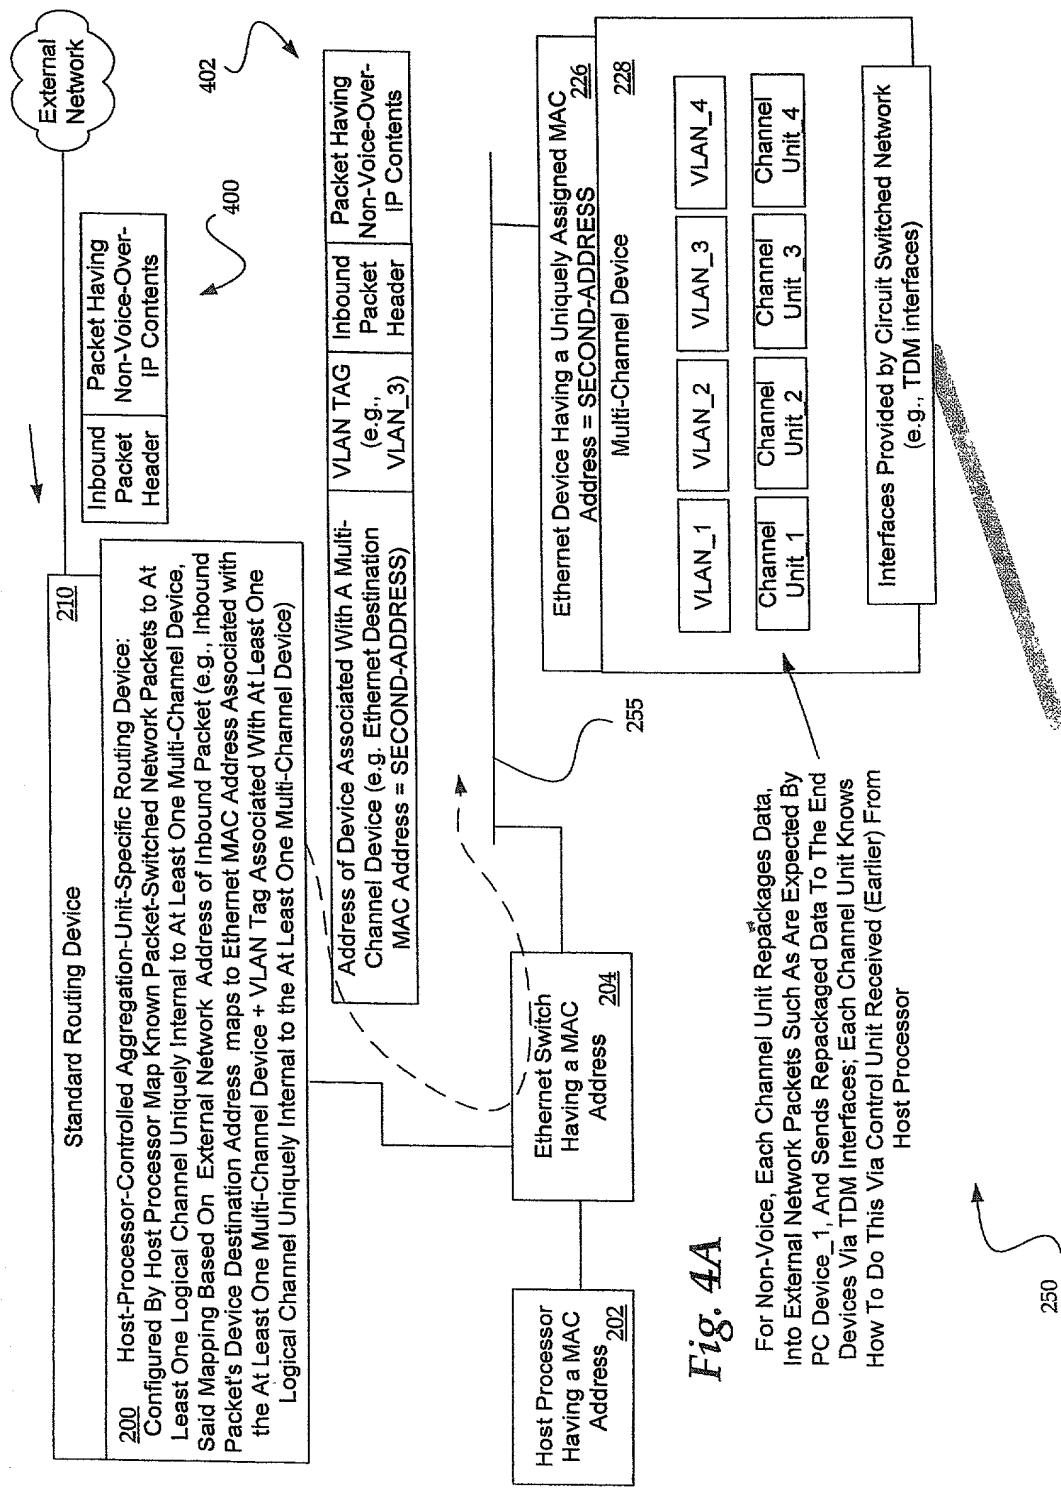


Fig. 44

For Non-Voice, Each Channel Unit Repackages Data, Into External Network Packets Such As Are Expected By PC Device_1, And Sends Repackaged Data To The End Devices Via TDM Interfaces; Each Channel Unit Knows How To Do This Via Control Unit Received (Earlier) From Host Processor

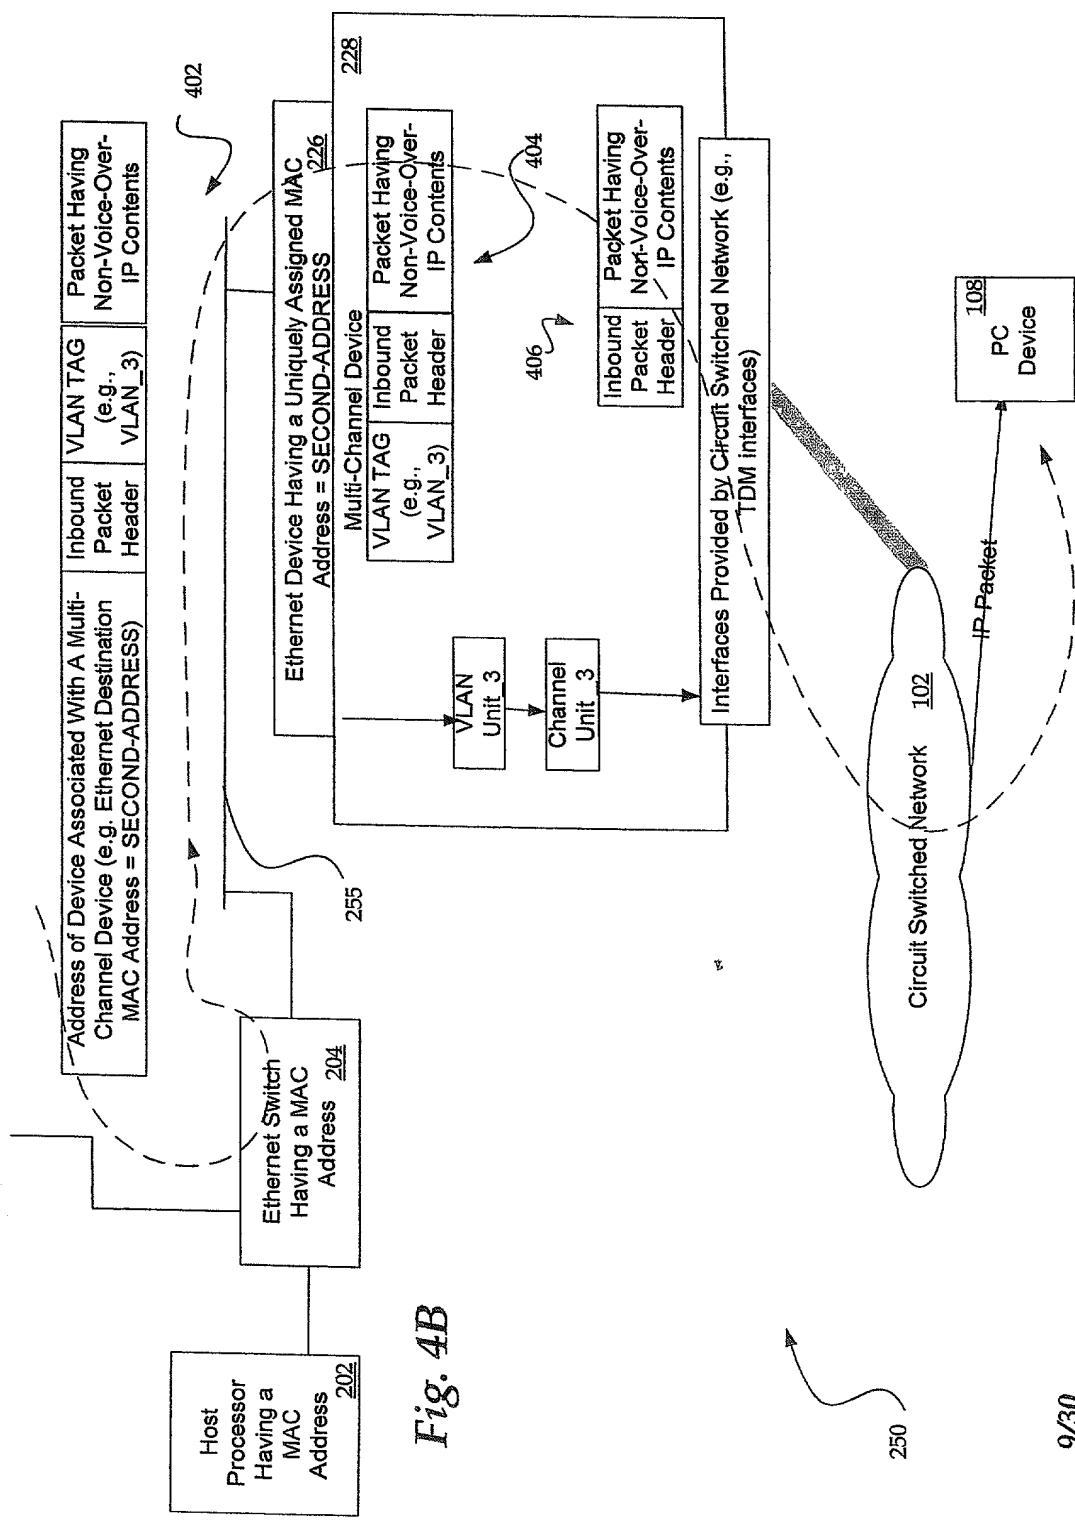


Fig. 4B

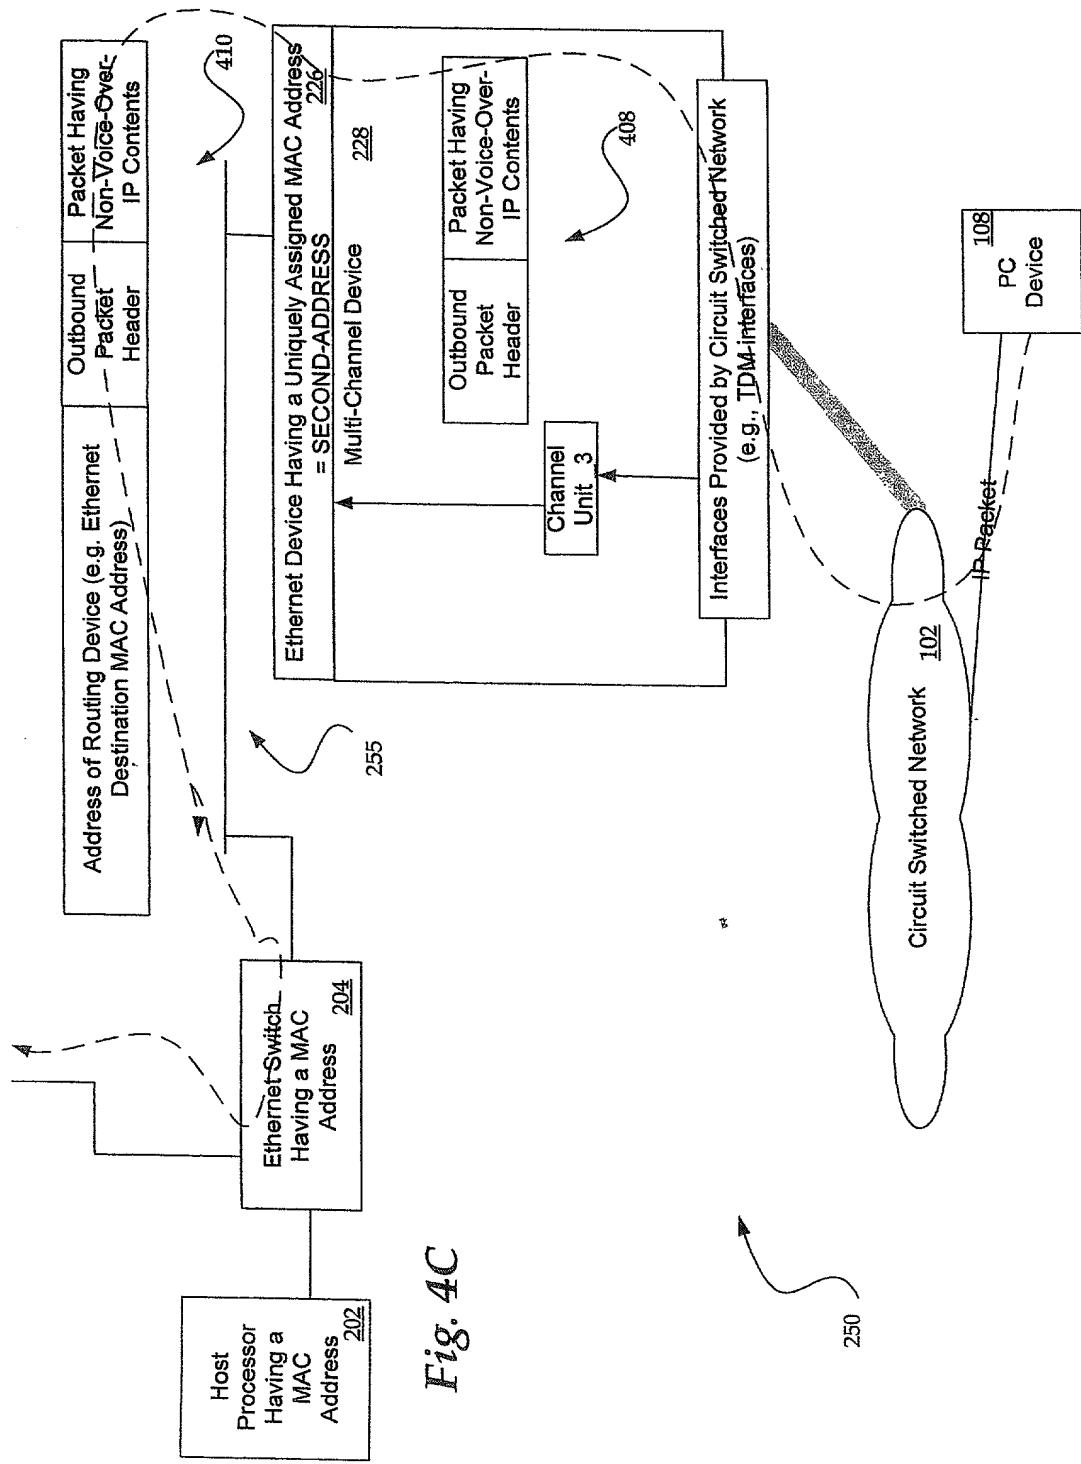
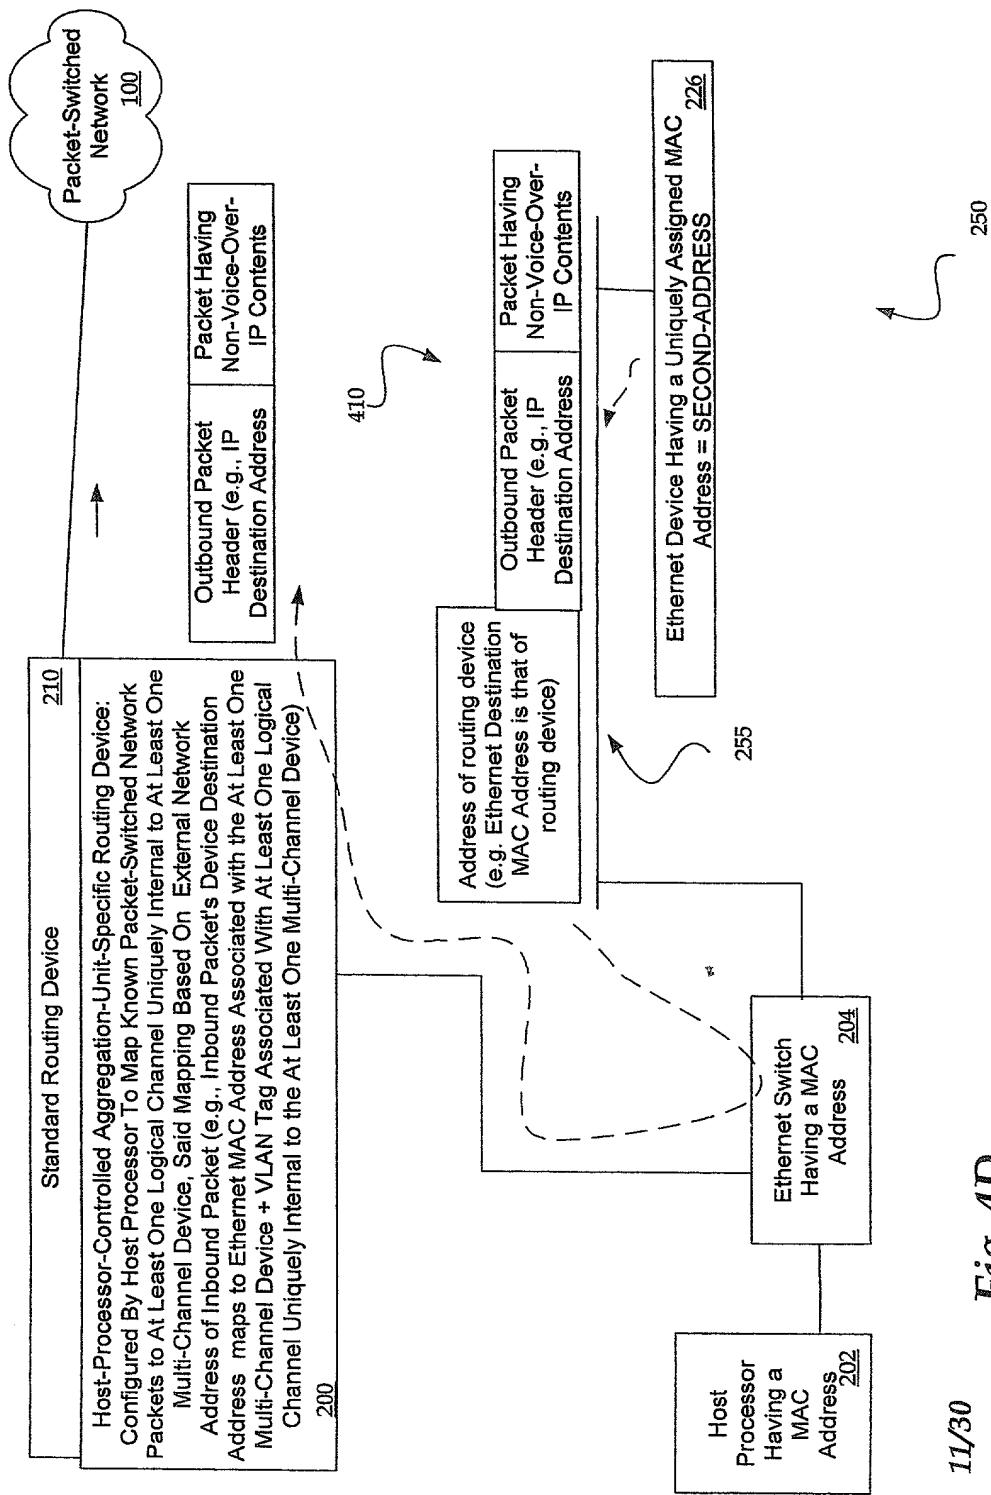


Fig. 4C



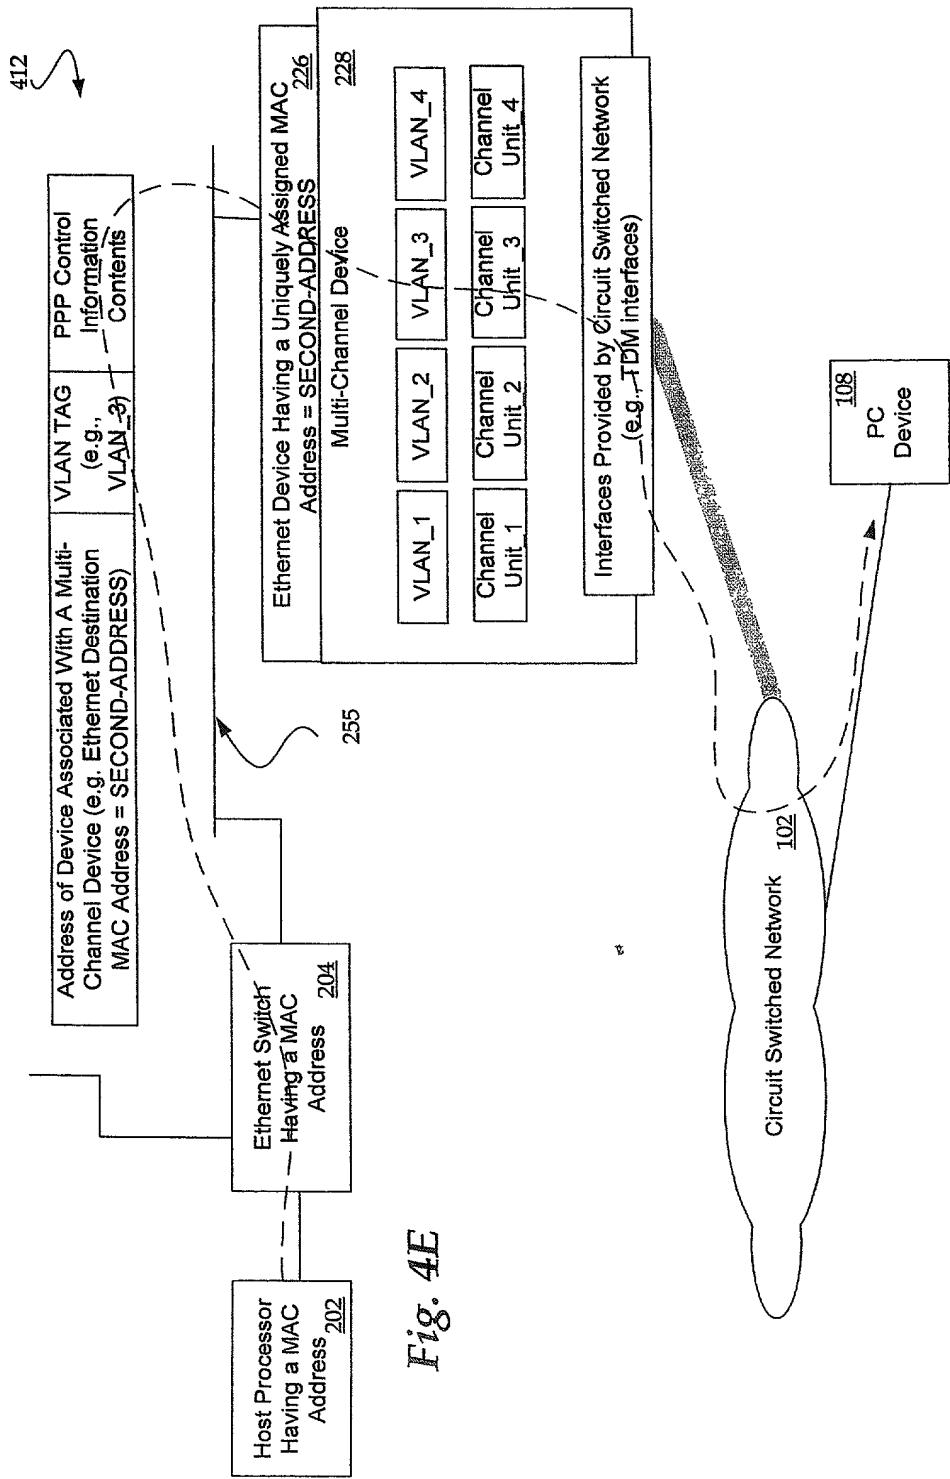


Fig. 4E

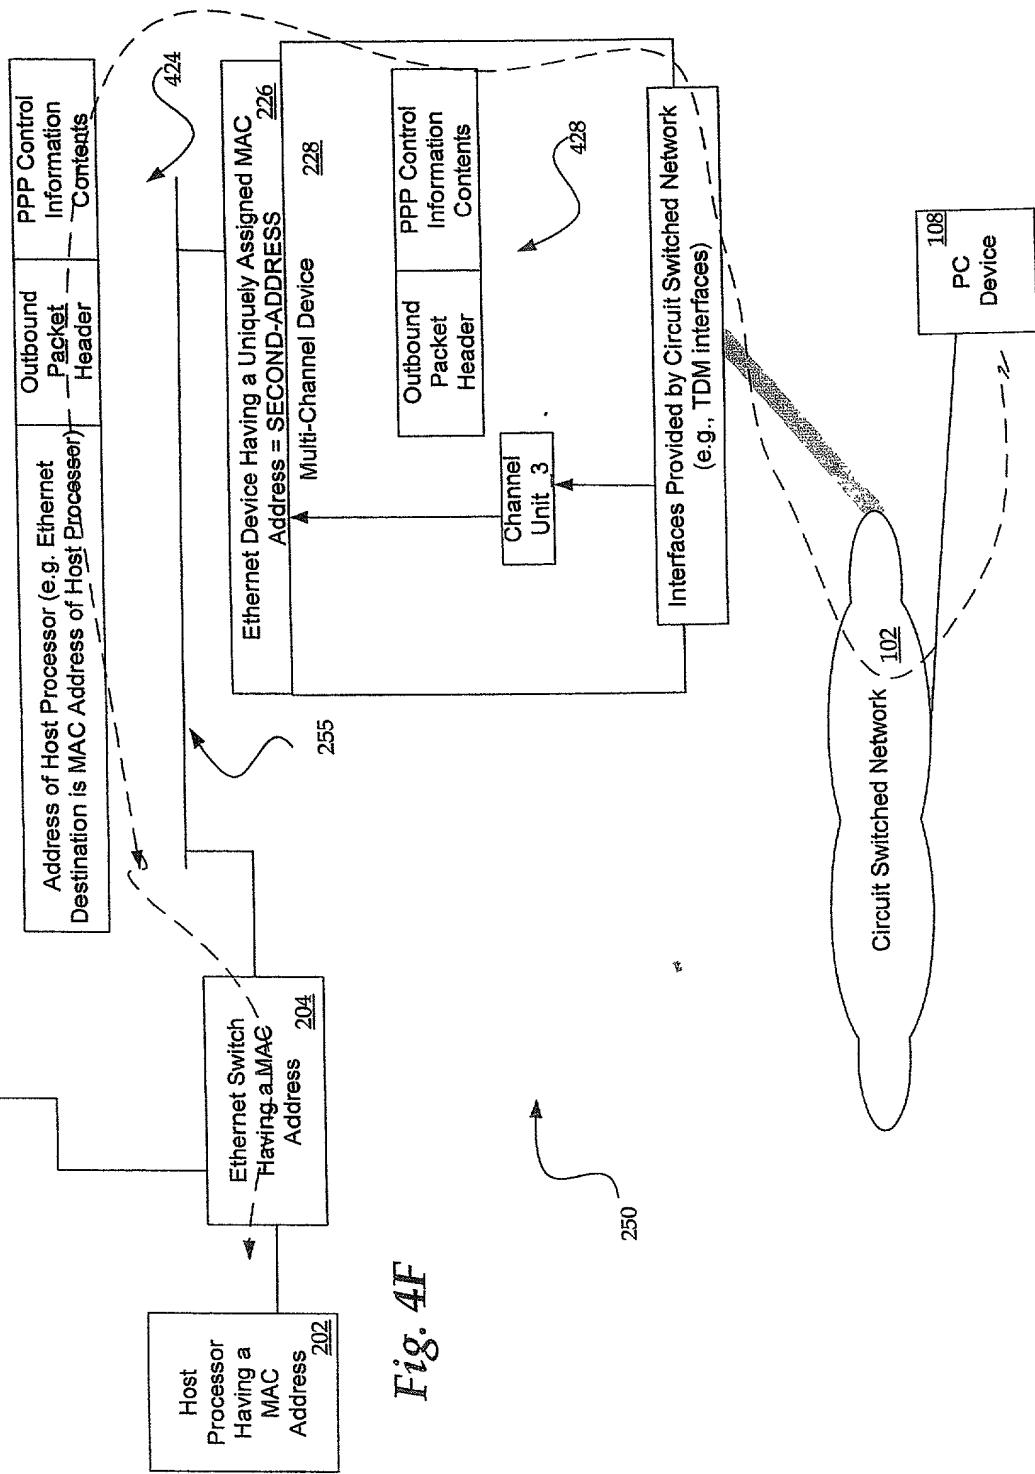


Fig. 4F

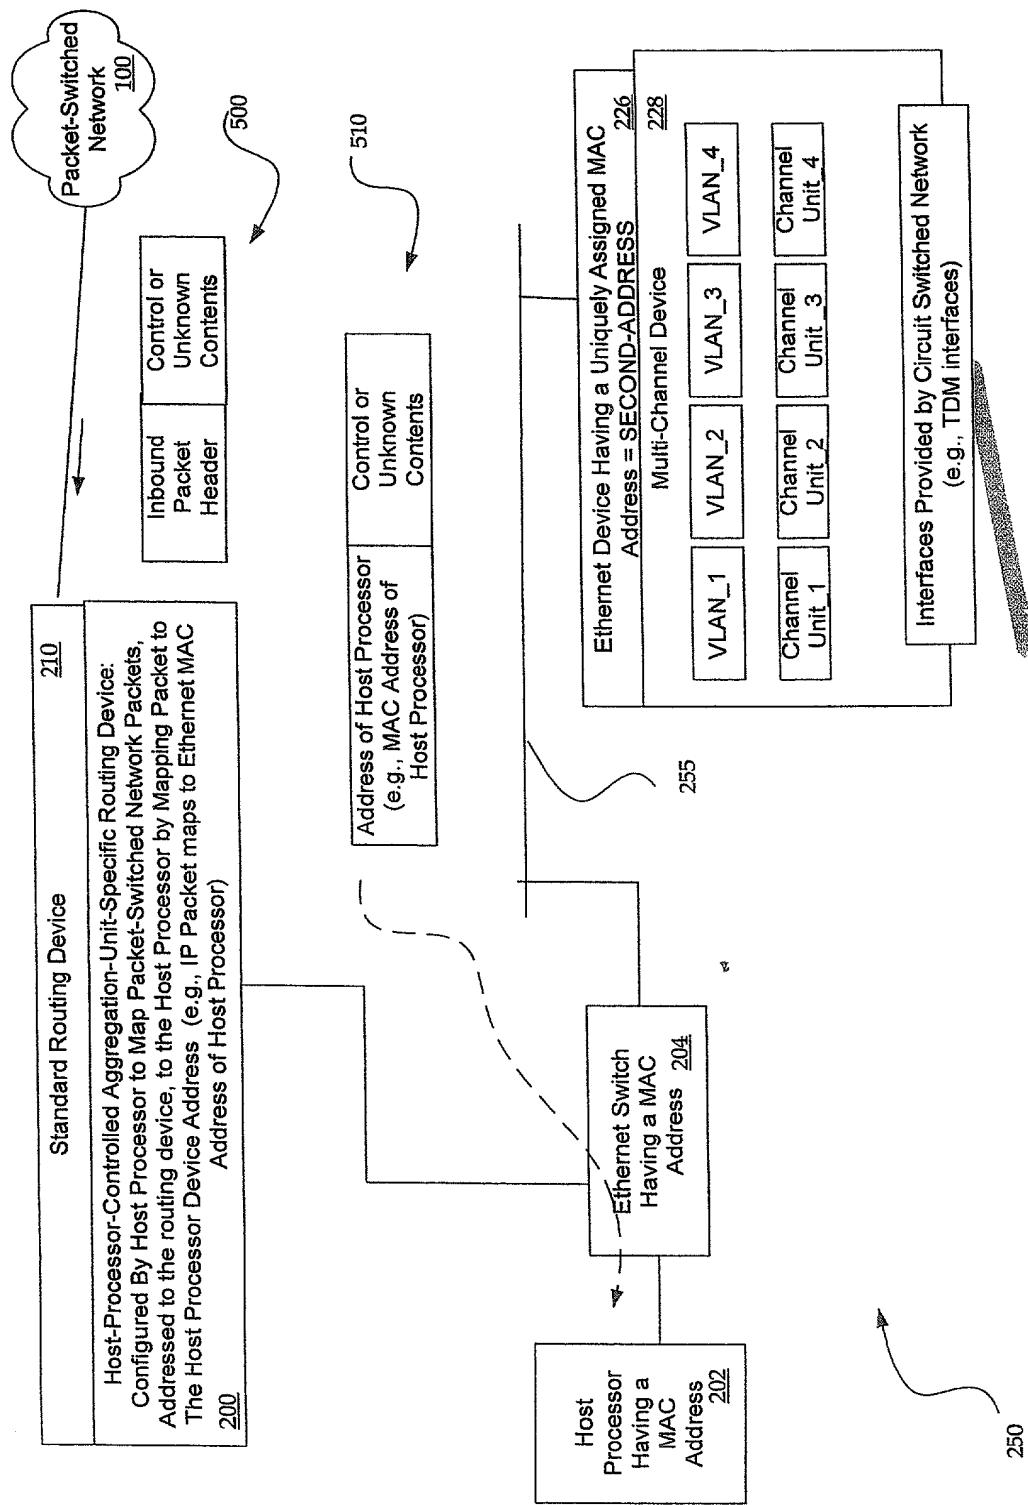


Fig. 5

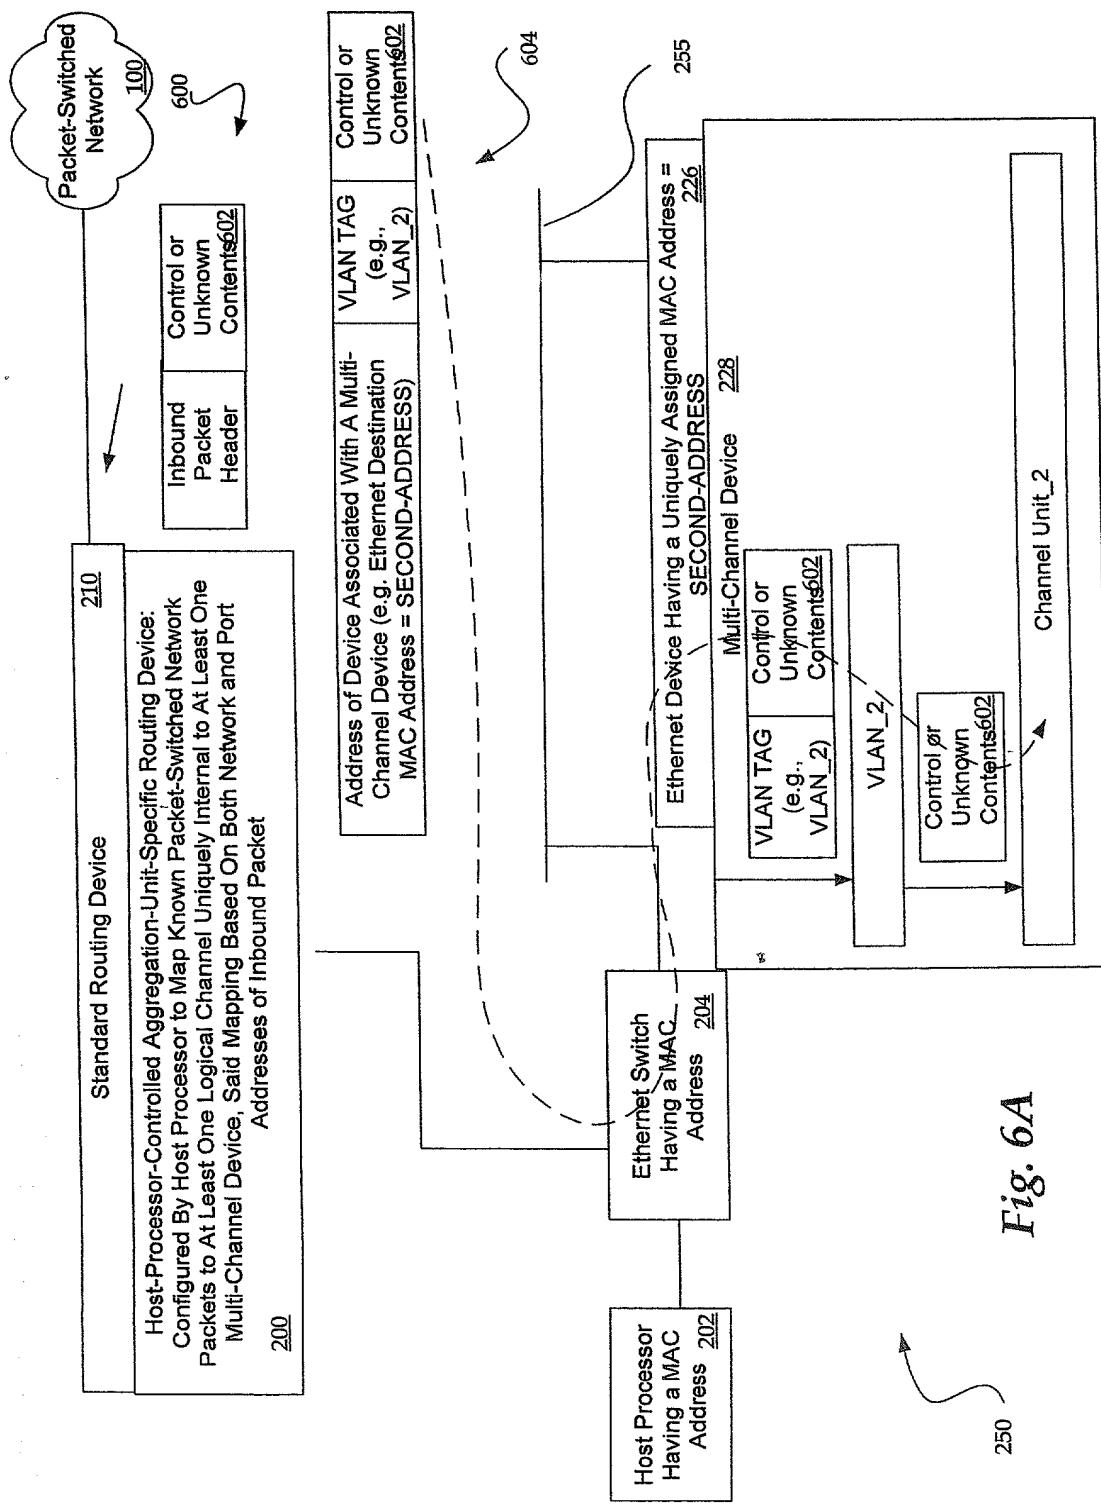


Fig. 6A

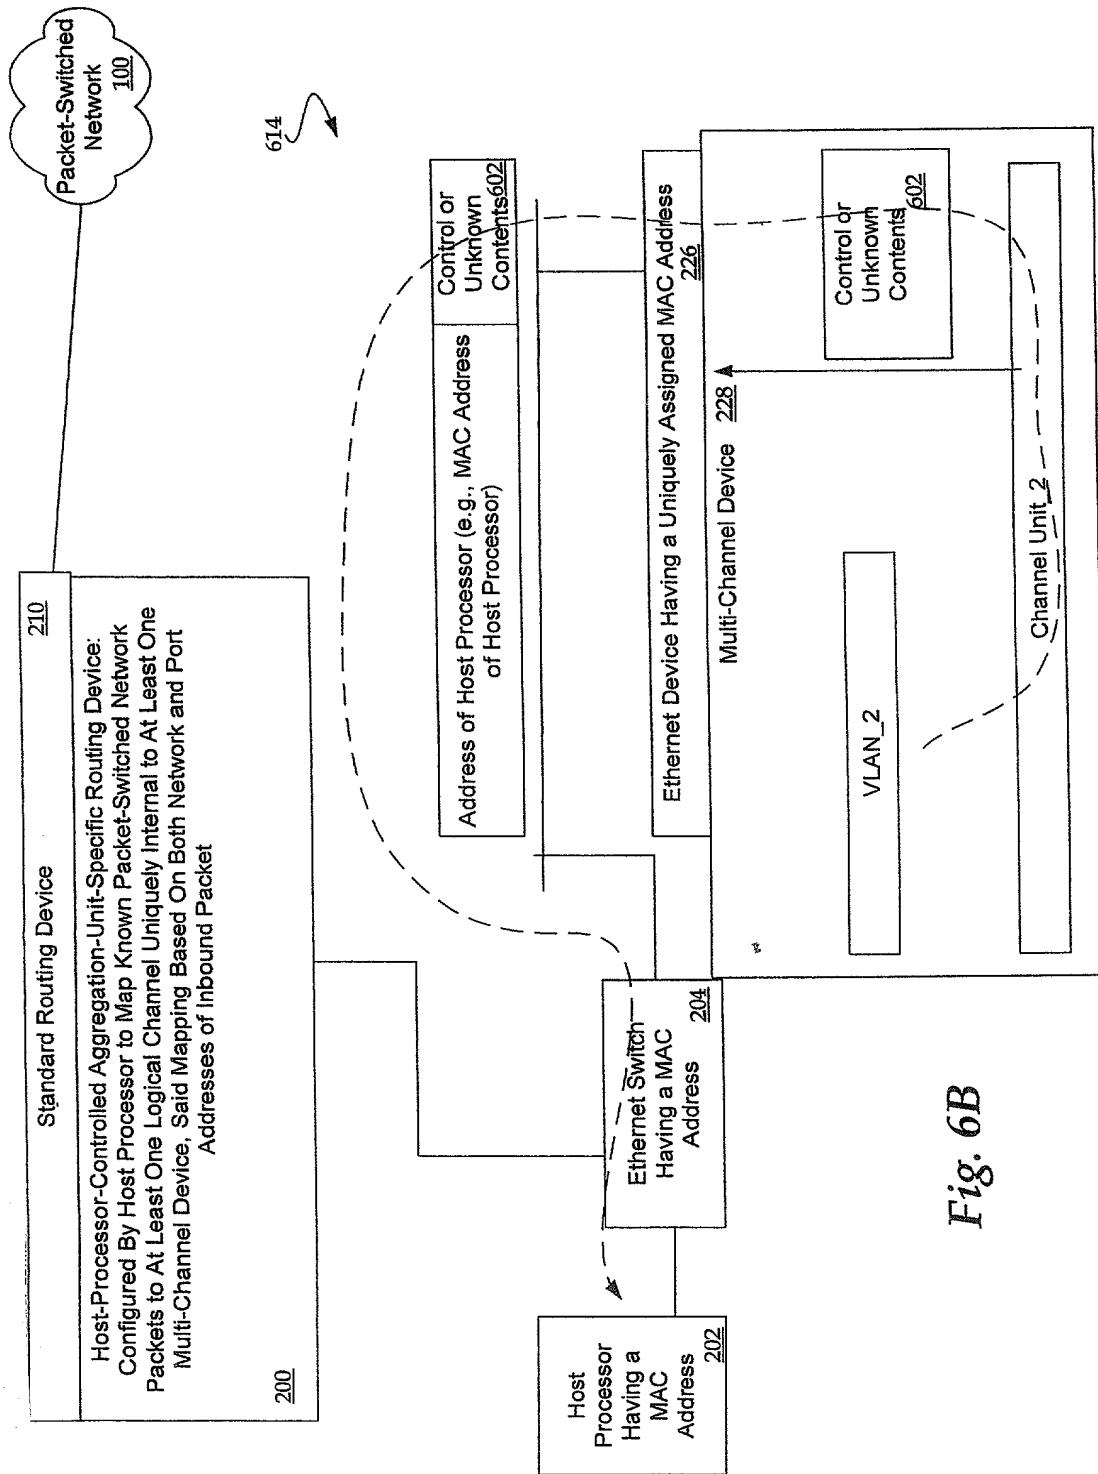


Fig. 6B

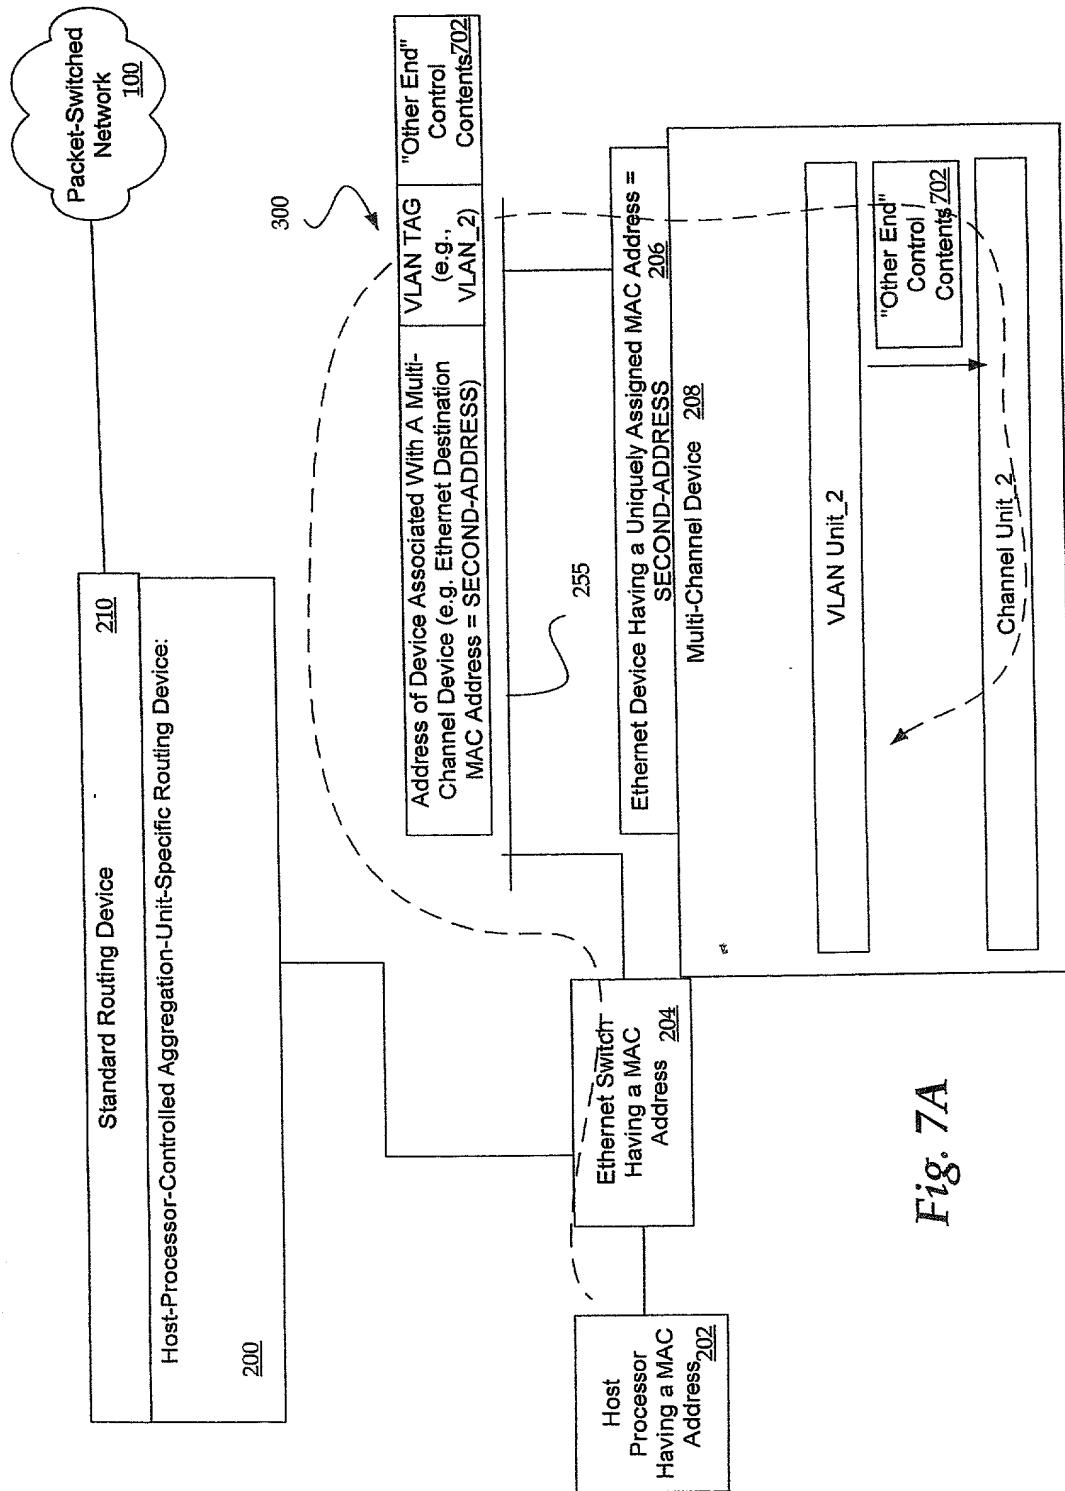


Fig. 7A

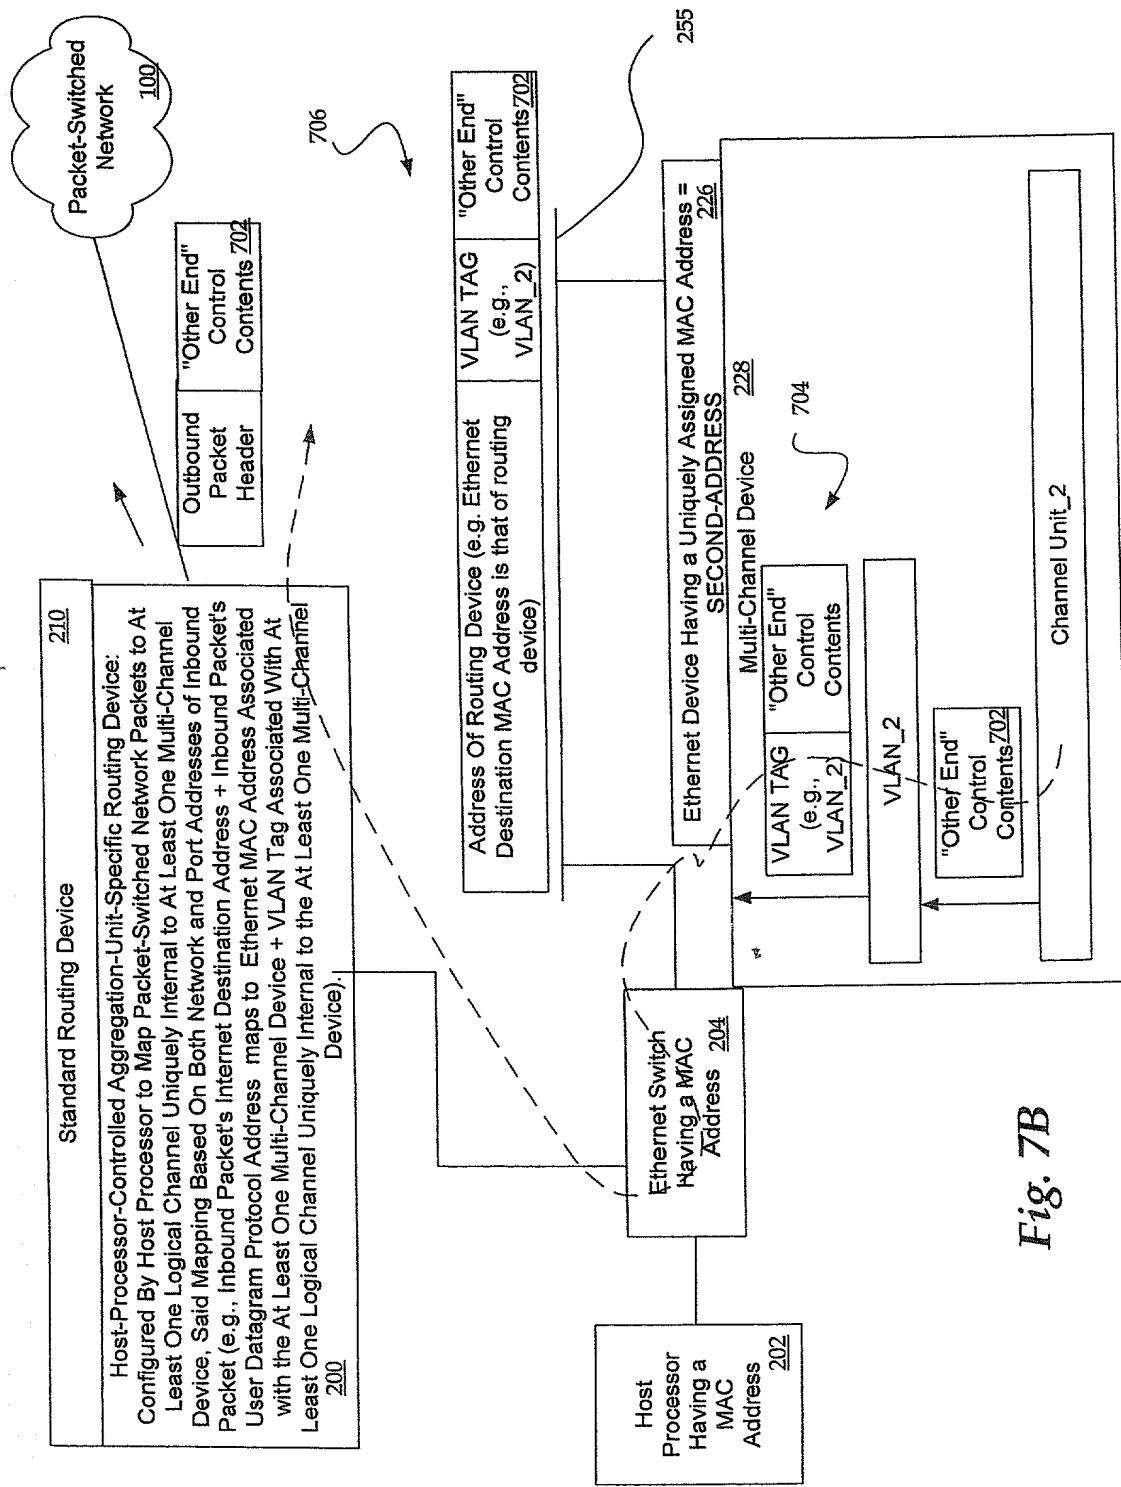


Fig. 7B

Fig. 8A

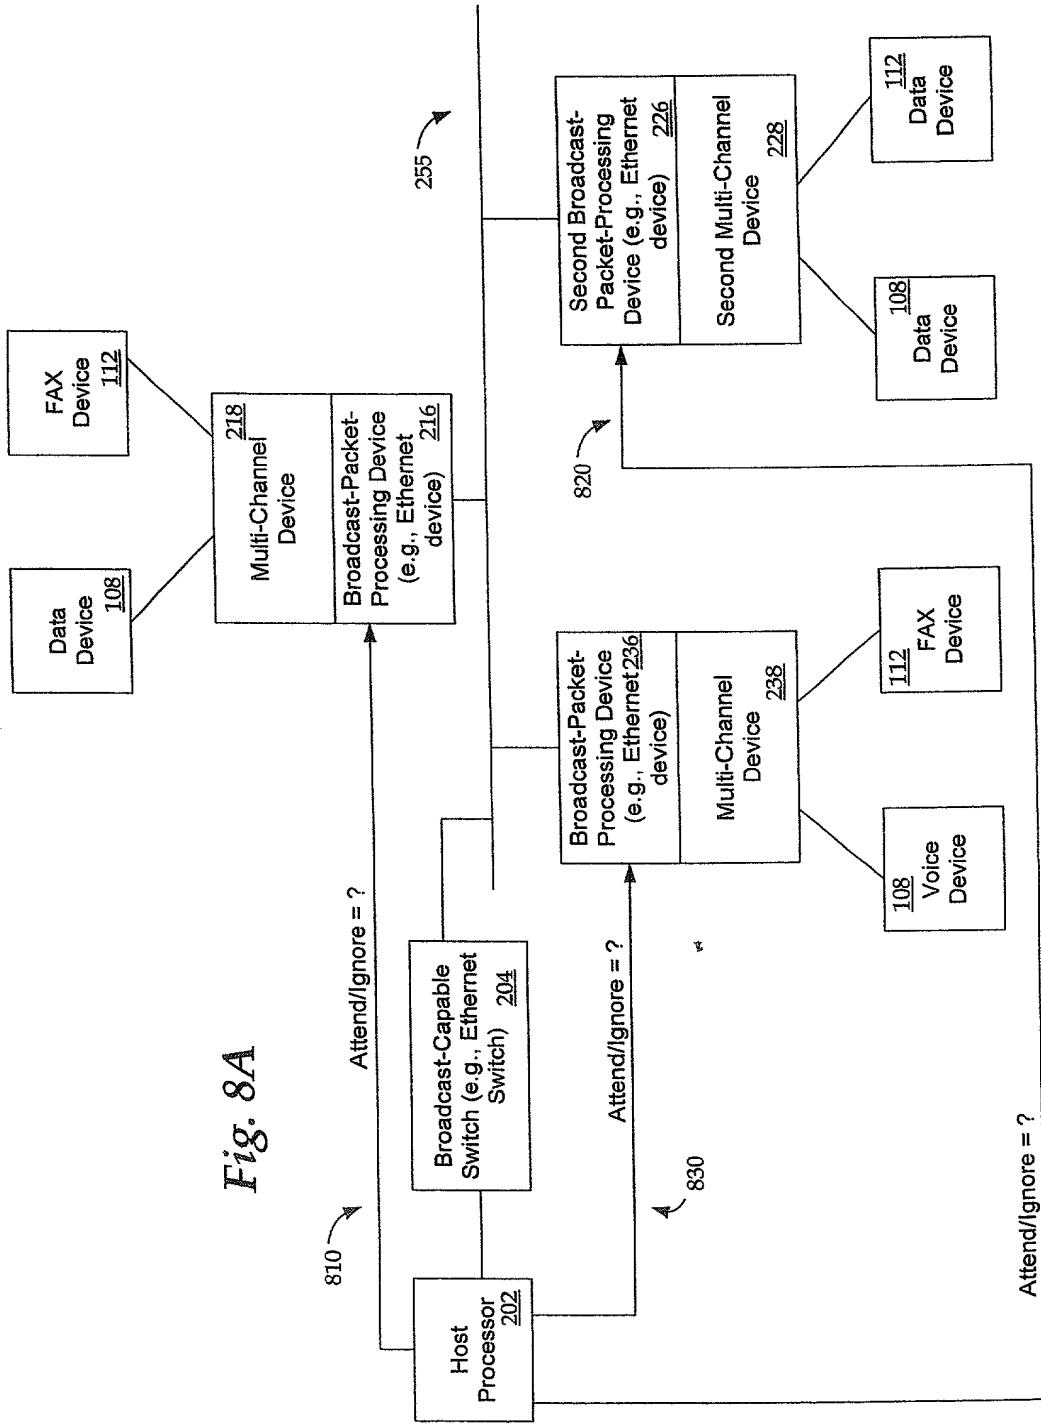


Fig. 8B

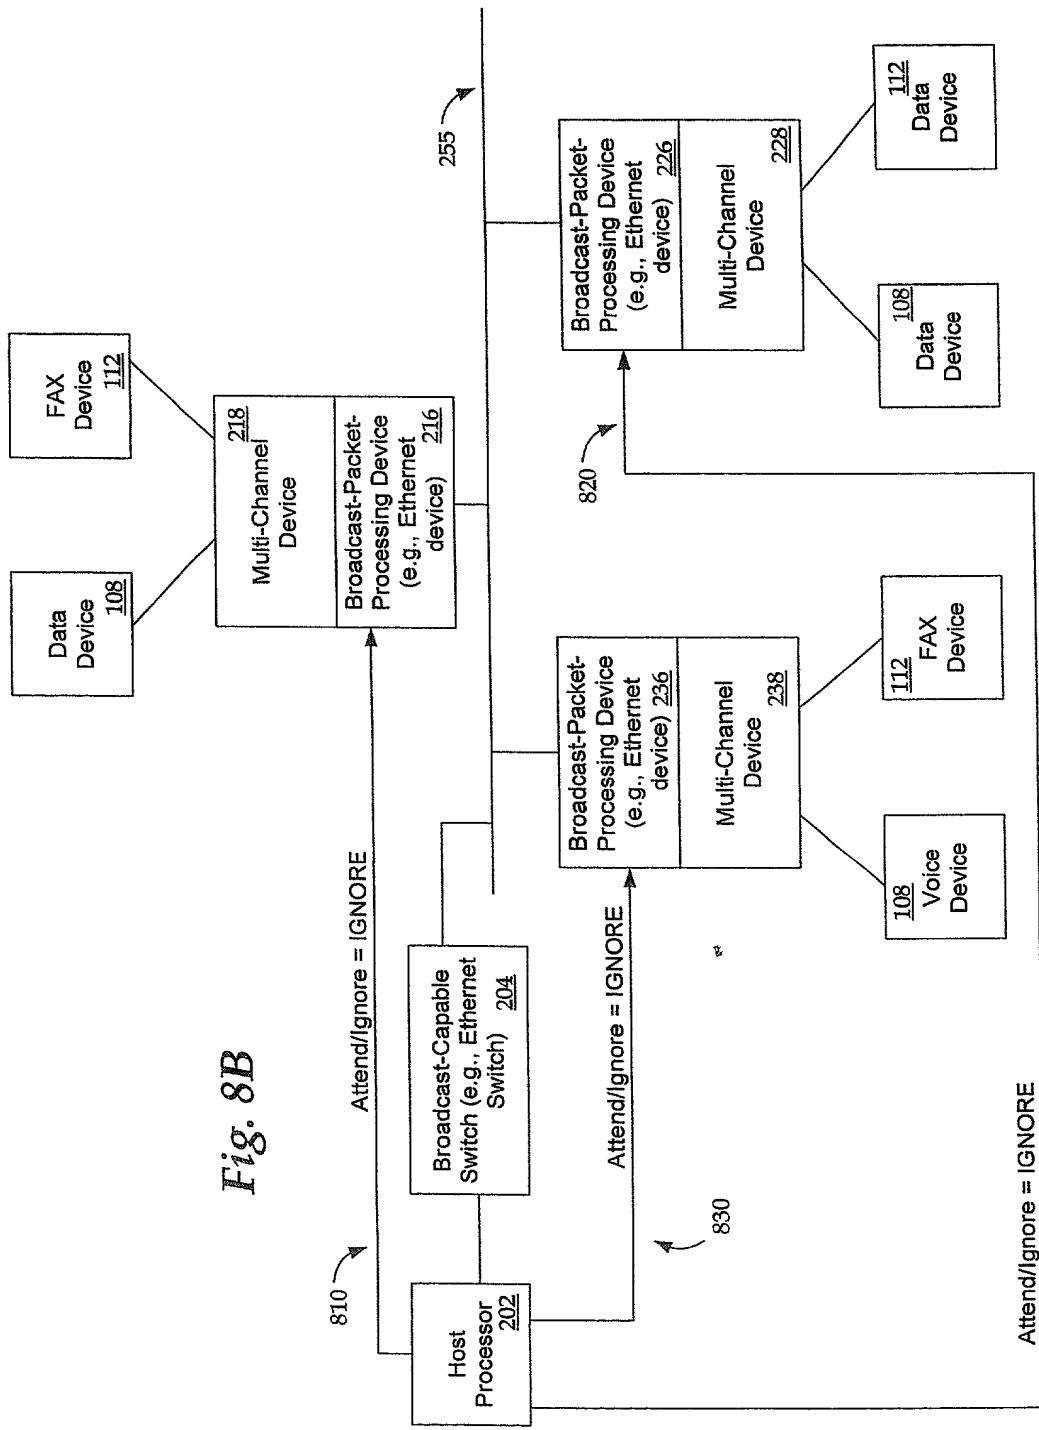
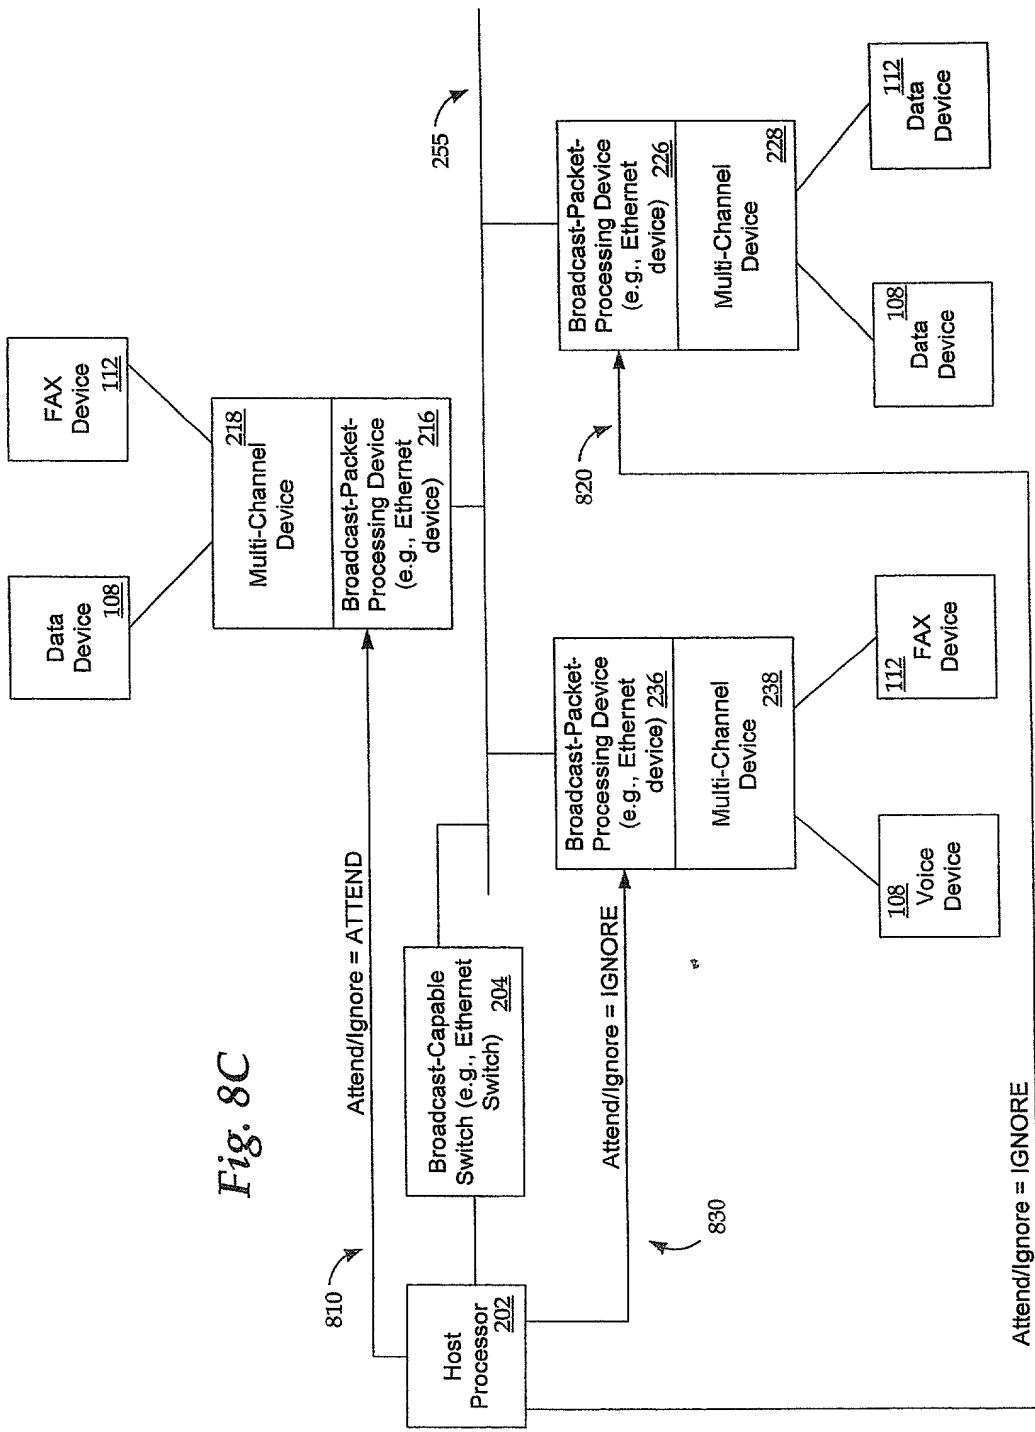


Fig. 8C



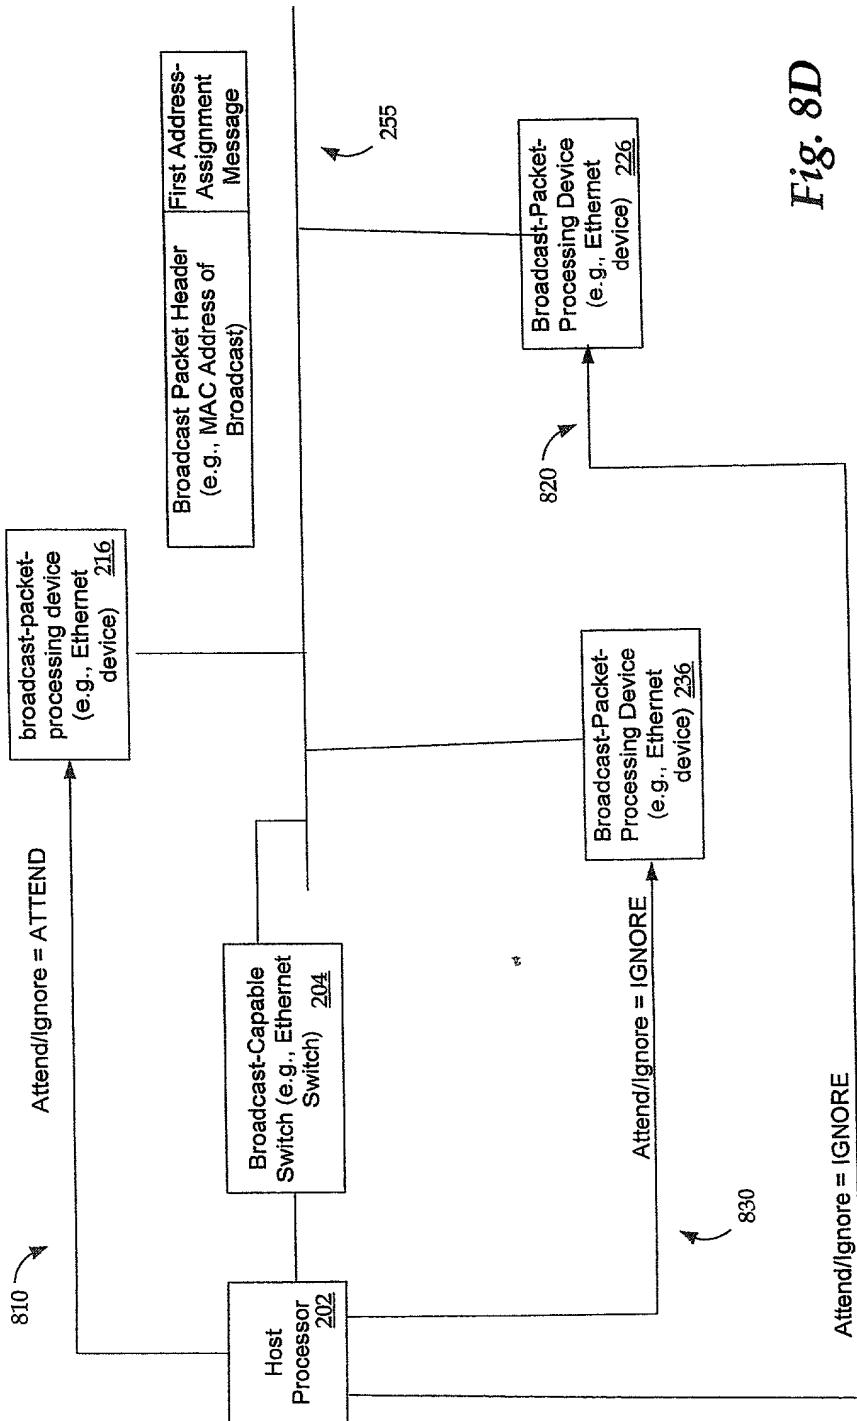


Fig. 8D

Fig. 8E

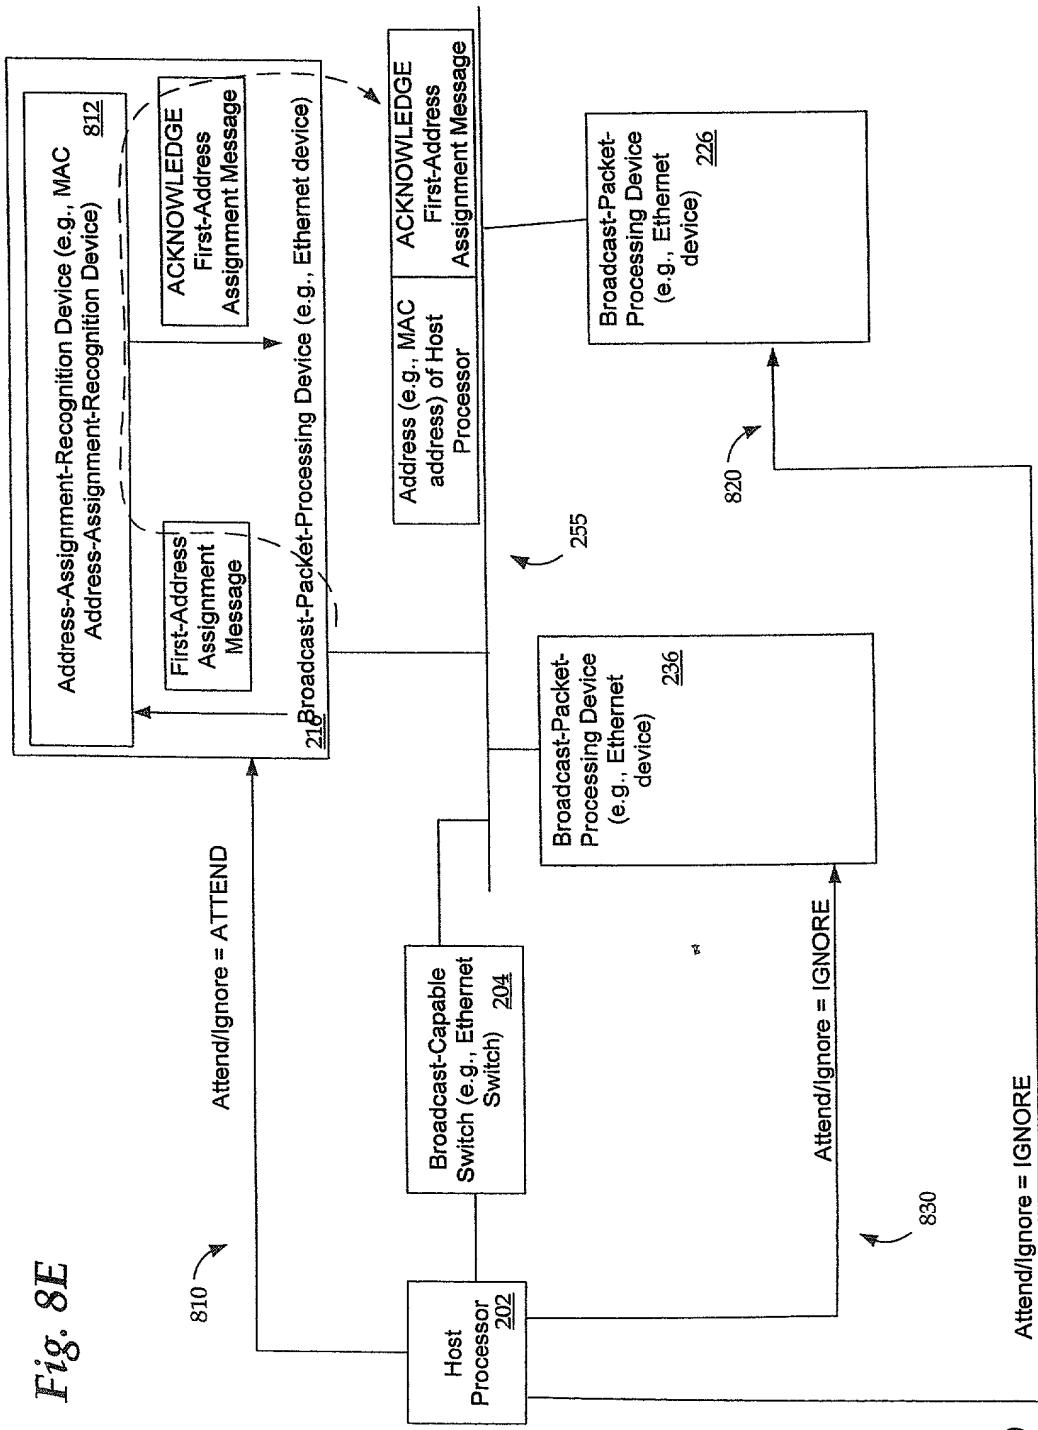


Fig. 8F

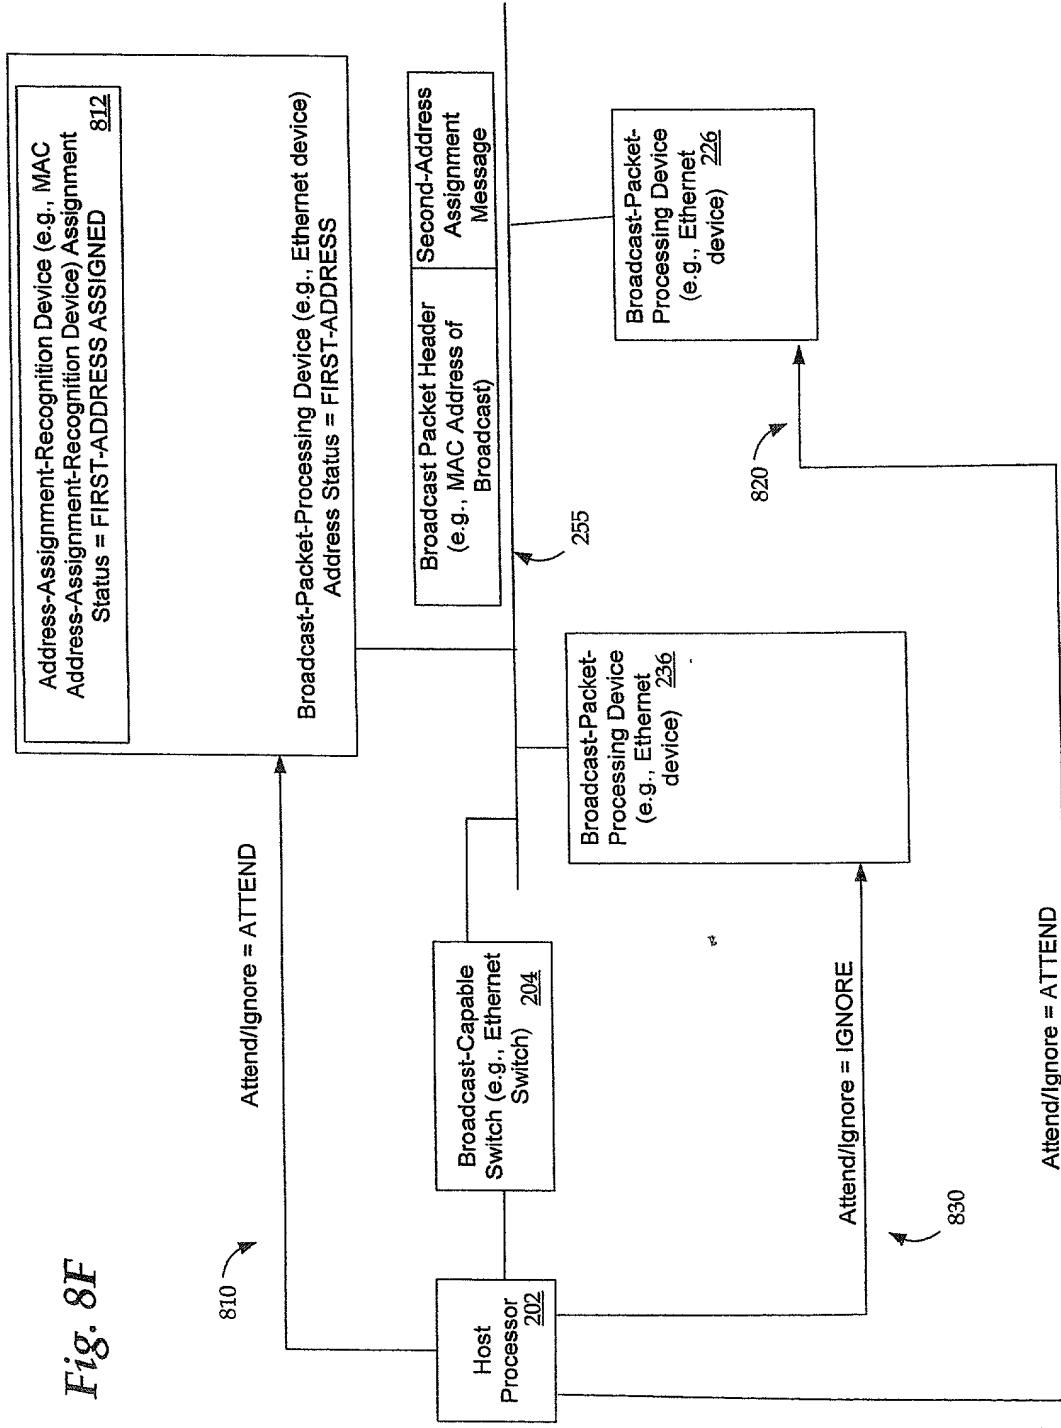


Fig. 8G

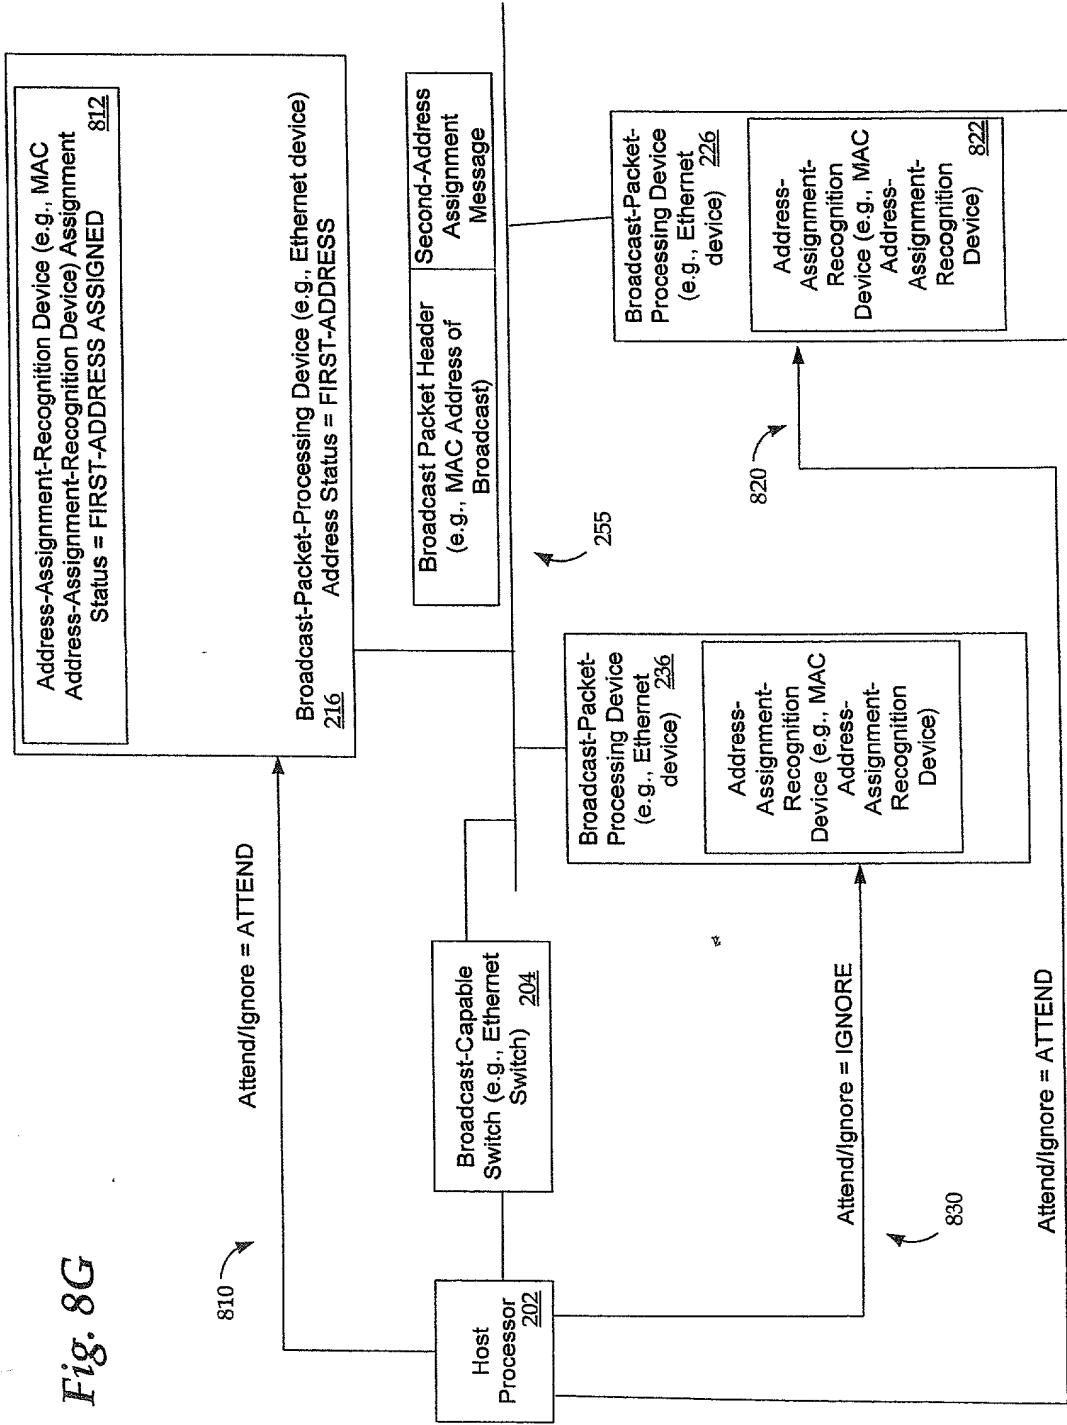


Fig. 8H

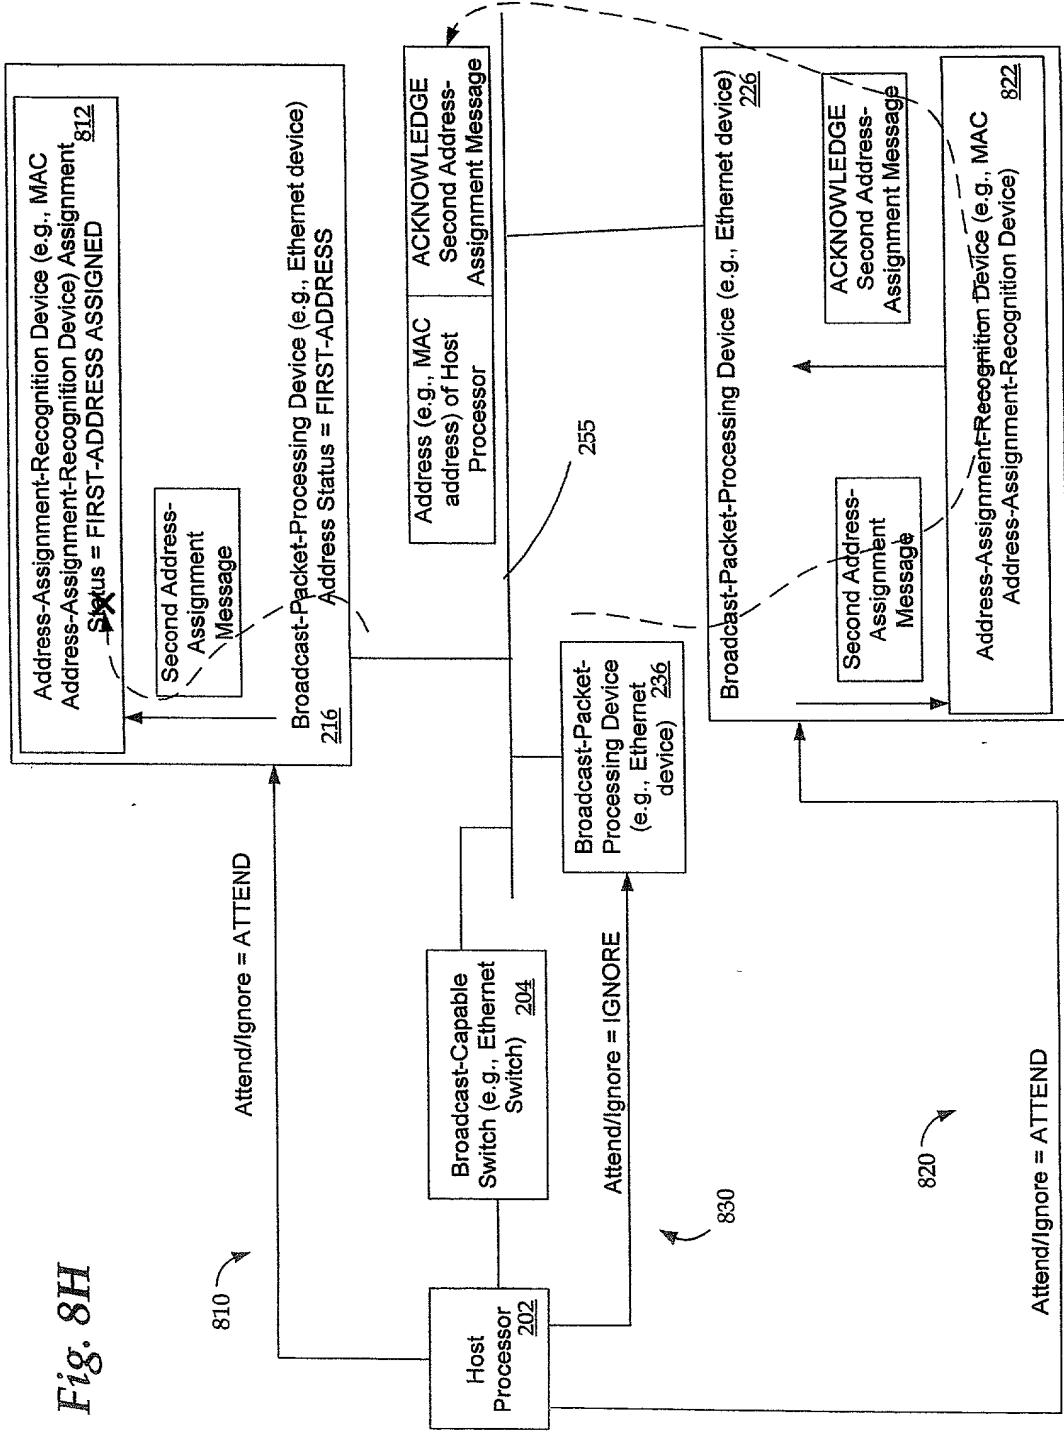


Fig. 8I

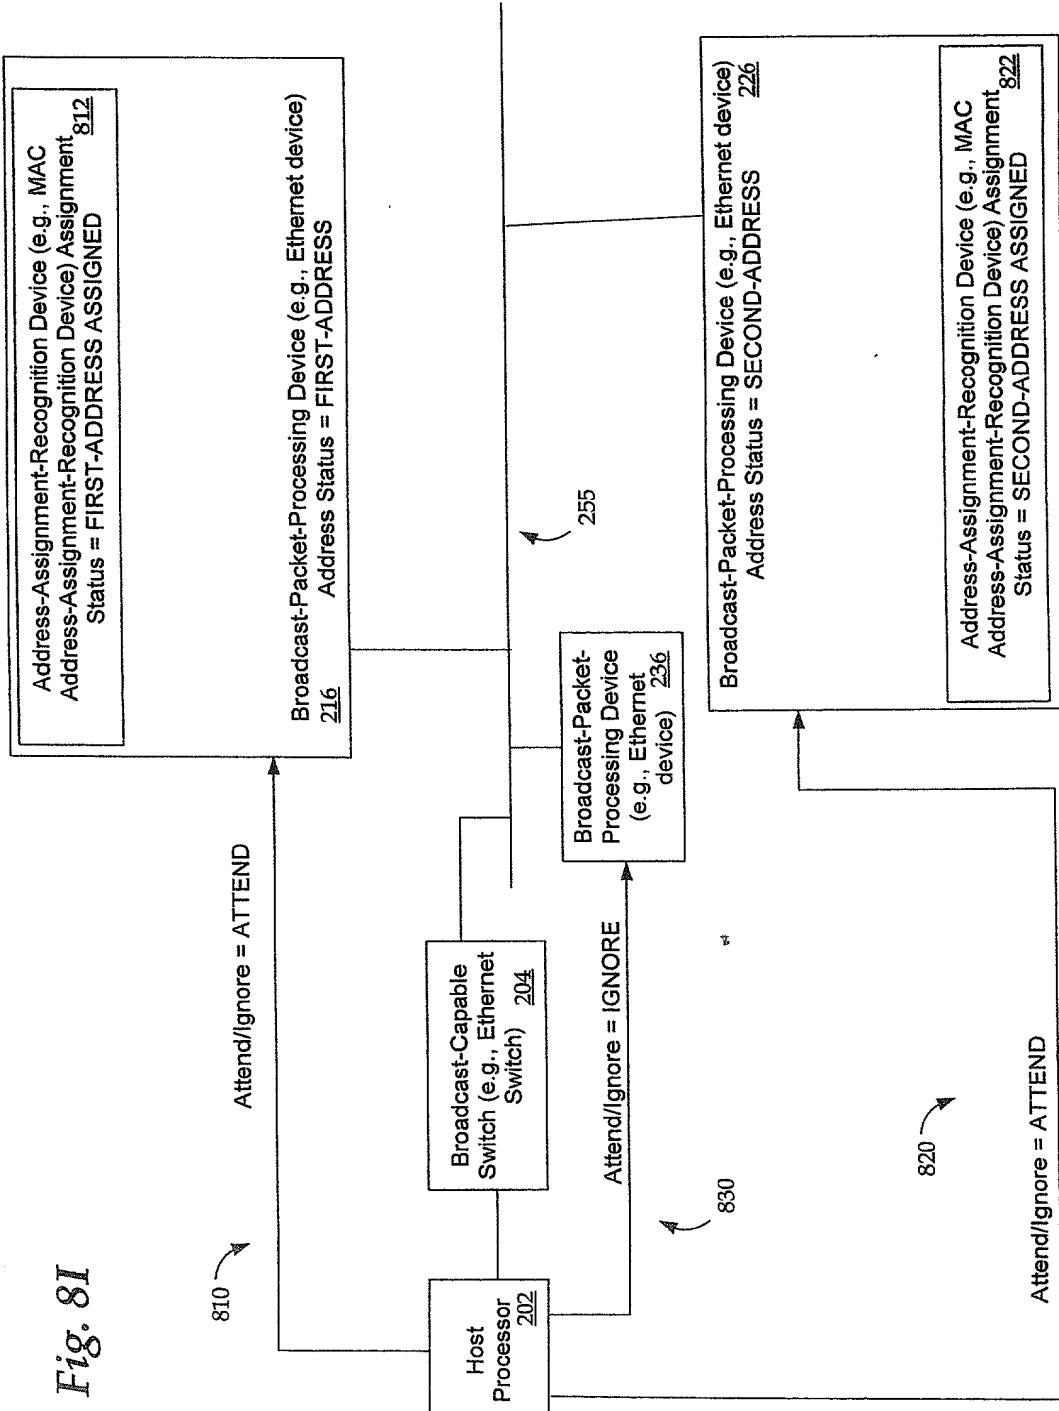


Fig. 8J

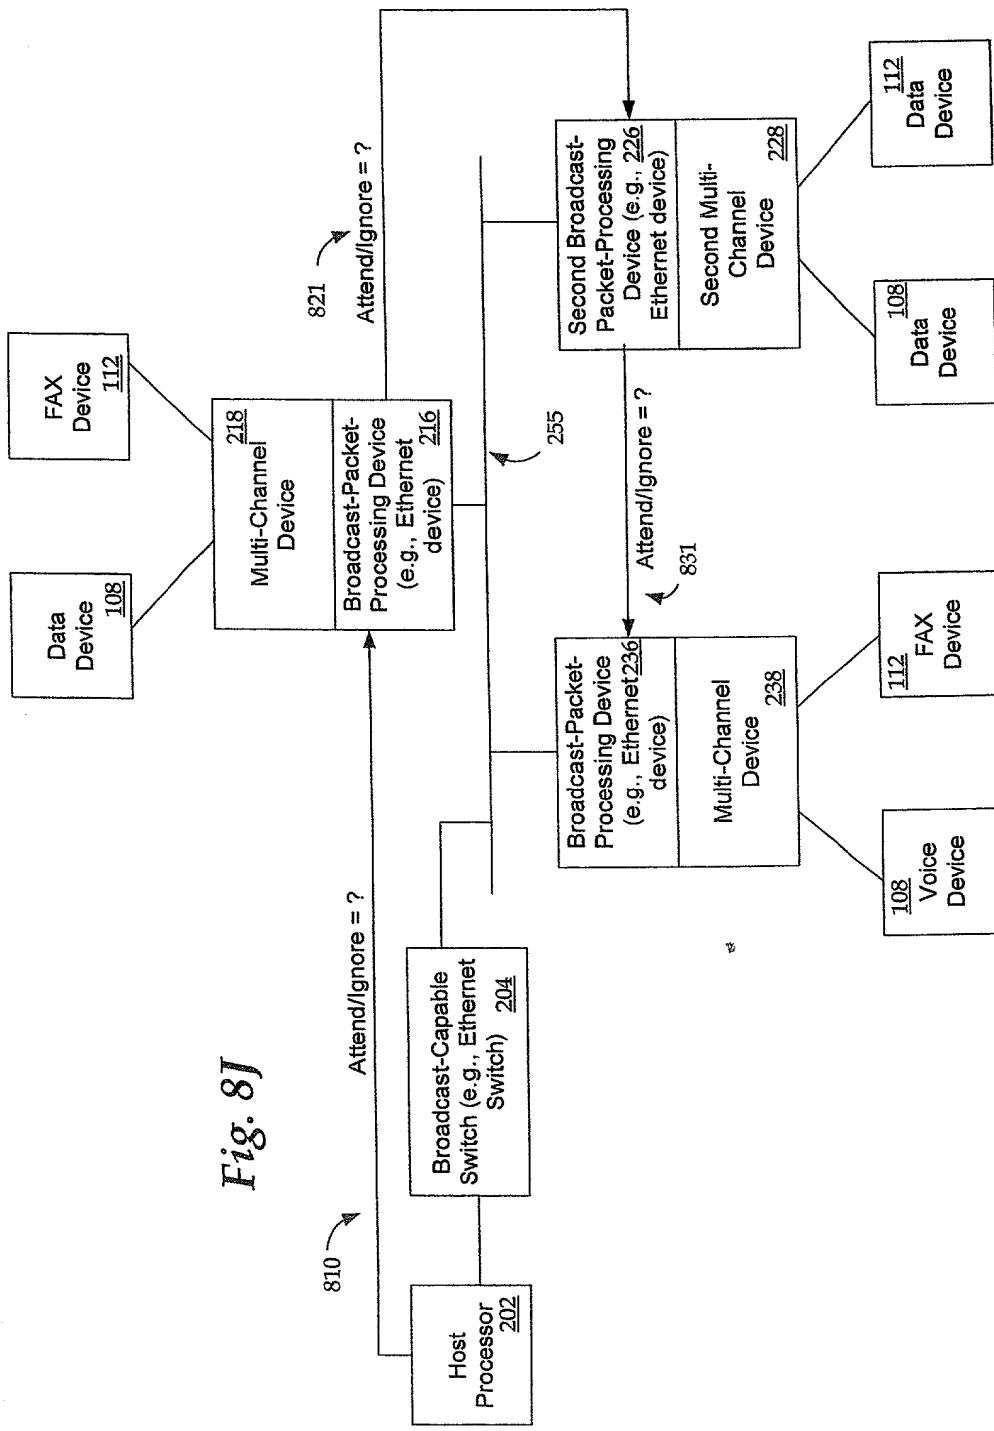


Fig. 9A

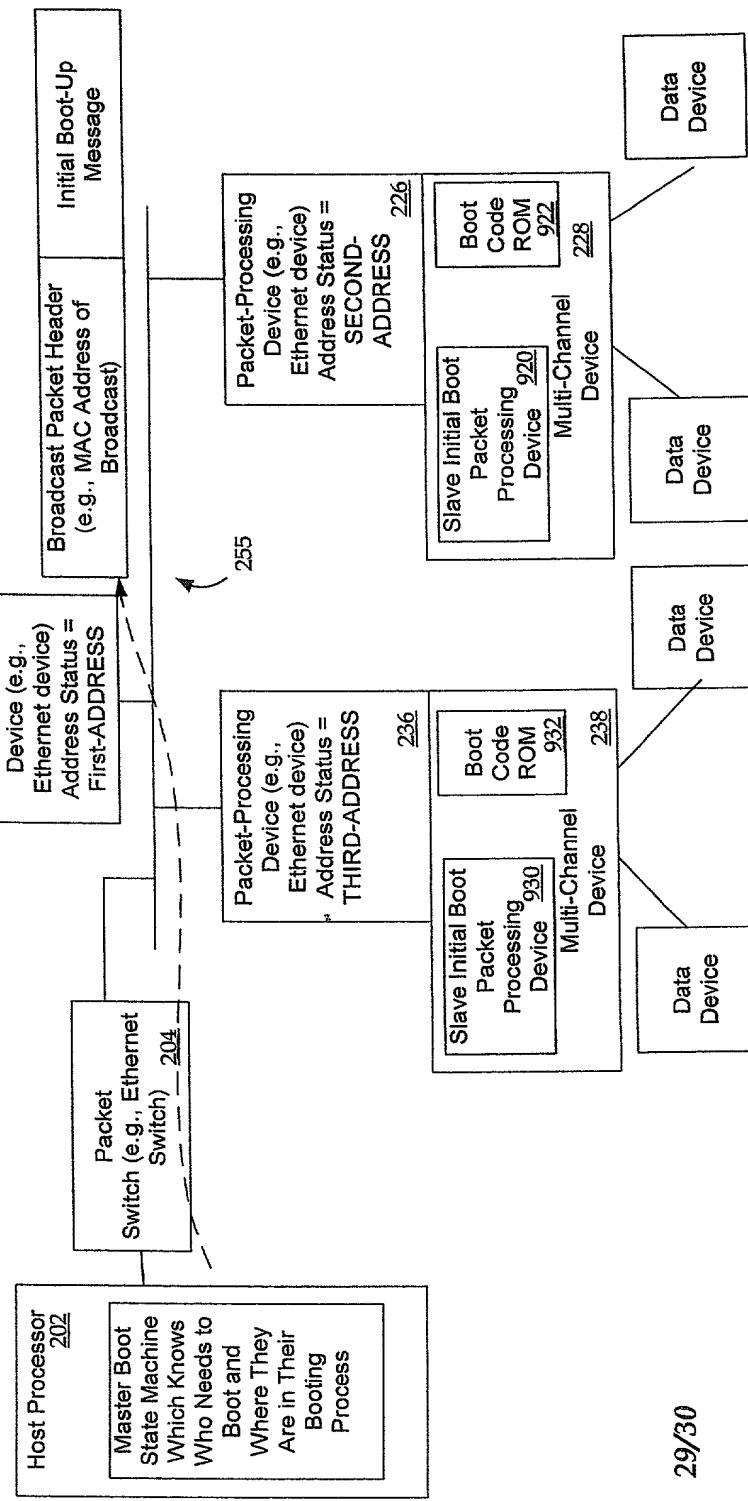


Fig. 9B

